


**ELECTRICAL DATA:**


- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~6GHz
- 3. VSWR: 1.30 MAX. AT DC-3 GHz  
1.50 MAX. AT 3-6 GHz
- 4. INSERTION LOSS: 0.65DB MAX. AT DC~3 GHz  
0.70B MAX. AT 3-6 GHz

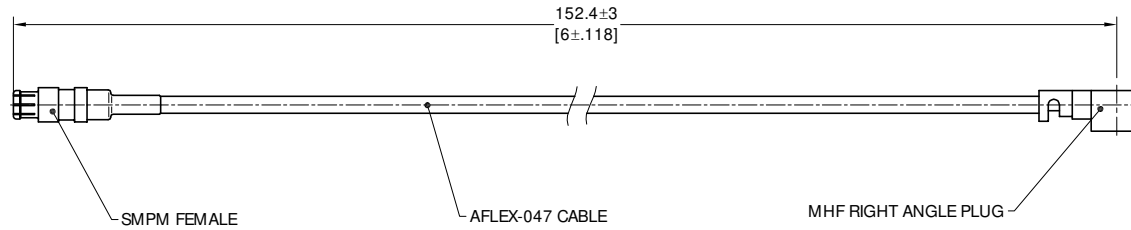

TITLE  
CABLE ASSEMBLY, SMPM STRAIGHT FEMALE TO  
MHF R/A PLUG, AFLEX-047 CABLE, 6 INCHES

- NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME  
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

AF047-SMPMF-MHF-6

SIZE  
A3

SCALE  
2.5:1

SHEET  
1/1

REV.  
A