


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~26.5 GHz
- 3 VSWR: 1.40 MAX
- 4 INSERTION LOSS: 1.95 dB MAX

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

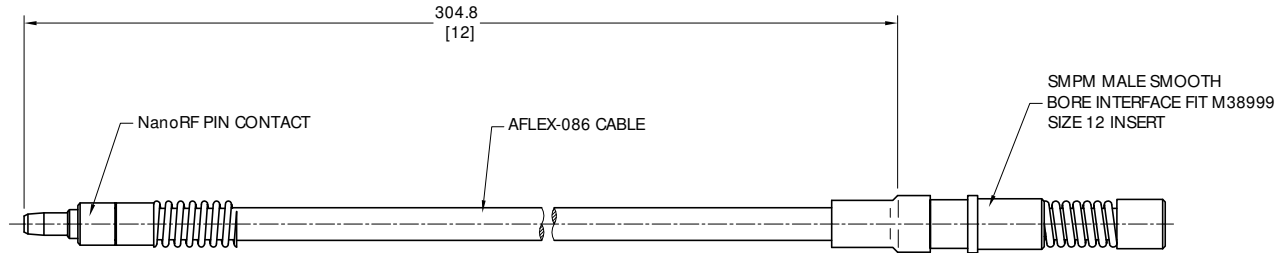

TITLE
CABLE ASSEMBLY, NanoRF PIN TO SMPM MALE SMOOTH
BORE INTERFACE, ANO AFLEX-086 CABLE, 12 INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

AF086-NRP-SMPMM-12

SIZE
A3

SCALE
2.5:1

SHEET
1/1

REV.
A