

4

3

2

1


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-65 GHz
- 3 VSWR: 1.35 MAX. AT DC-26.5 GHz
- 4 INSERTION LOSS: 1.50 dB MAX.

D

D

C

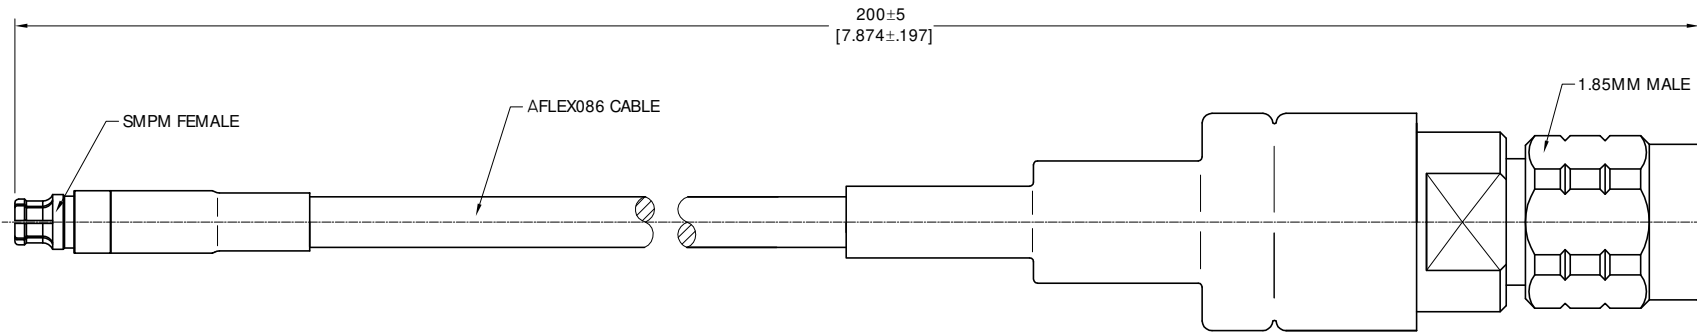

B

B

A

A



TITLE

CABLE ASSEMBLY, SMPM STRAIGHT FEMALE TO 1.85MM
STRAIGHT MALE, ANO AFLEX086 CABLE, 200MM

NOTES:

- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
- 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME
- 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
- 4. LENGTH TOLERANCE IS ±2%.

VIEW



PART NO.

AF086-SMPM(F)-18M-200MM

SIZE	A3
------	----

SCALE	4:1
-------	-----

SHEET	1/1
-------	-----

REV.	A
------	---

4

3

2

1