


4 | 3 | 2 | 1

**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~26.5 GHz
- 3 VSWR: 1.35 MAX
- 4 INSERTION LOSS: 4.65 DB MAX

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC (REACH): COMPLIANT

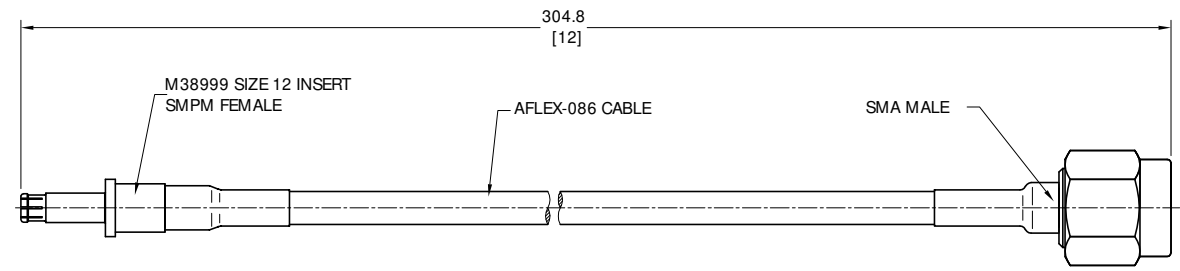

TITLE  
 CABLE ASSEMBLY, SMPM FEMALE TO SMA MALE,  
 ANO AFLEX-086 CABLE, 36 INCHES

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME  
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES  
 4. LENGTH TOLERANCE IS ±2%.

VIEW	PART NO.			
	AF086-SMPMF-SMAM-3FT			
SIZE	SCALE	SHEET	REV.	
A3	2.5:1	1/1	A	

4 | 3 | 2 | 1