**ELECTRICAL DATA:**

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~40 GHz
3 VSWR: 1.30 MAX. AT DC~26.5 GHz
4 INSERTION LOSS: 1.95DB DC~26.5 GHz

**ENVIRONMENTAL DATA:**

1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/45/EC(REACH): COMPLIANT

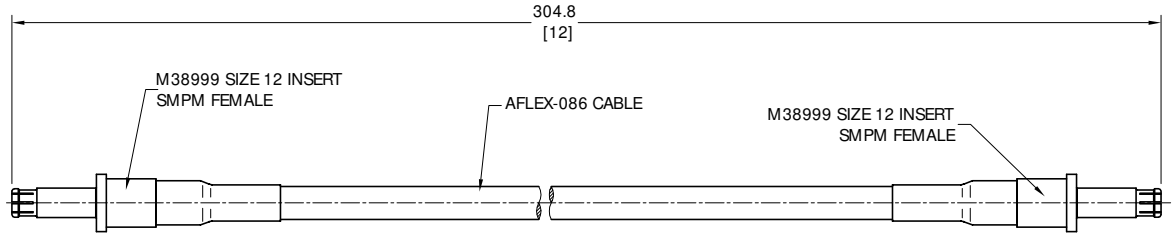


NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES
4. LENGTH TOLERANCE IS ±2%.

ANOISON

TITLE
CABLE ASSEMBLY, SMPM FEMALE TO SMPM FEMALE, ANO AFLEX-086 CABLE, 12 INCHES

VIEW

PART NO.
AF086-SMPMF-SMPMF-12

| SIZE | SCALE | SHEET | REV. |
|---|---|---|---|
| A3 | 2.5:1 | 1/1 | A |