

MATERIAL & FINISH:

1. BODY: BRASS, GOLD PLATED
2. CENTER CONTACT: BRASS, GOLD PLATED
3. INSULATOR: PTFE
4. RING: BERYLLIUM COPPER ALLOY, GOLD PLATED

ENVIRONMENTAL DATA:


1. TEMPERATURE RANGE: -55°C~+125°C
2. 2011/65/EC (RoHS): COMPLIANT

ELECTRICAL DATA:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~6 GHz
3. VSWR: 1.30 MAX. AT DC~6GHz

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/17	J. QU
B	CHANGED OD SIZE	06/22/17	J. QU

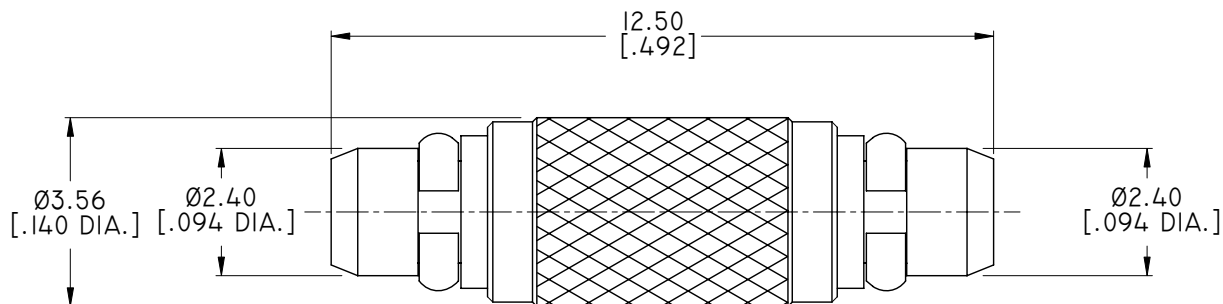

DRAWN	W. YANG	DATE	06/22/17
CHECKED	L. YANG	DATE	06/22/17
APPROVED	J. QU	DATE	06/22/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX		±0.13 [0.005"]	
.X		±0.20 [0.008"]	
X		±0.50 [0.019"]	
.X°		±1°	
X°		±2°	



TITLE
ADAPTER, MMCX MALE TO MMCX MALE

VIEW 	PART NO. ANO III-III-I405			
	SIZE A3	SCALE 10:1	SHEET 1/1	REV. B