

MATERIAL & FINISH:

1. OUTER CONTACT: BRASS, GOLD PLATED
2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3. RING: BERYLLIUM COPPER ALLOY, GOLD PLATED
4. INSULATOR: PTFE



ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -55°C~+125°C
2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~6GHz
3. VSWR: 1.30 MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/06/15	J. QU
B	MODIFY FREQUENCY RANGE: DC~6GHZ	03/12/15	J. QU

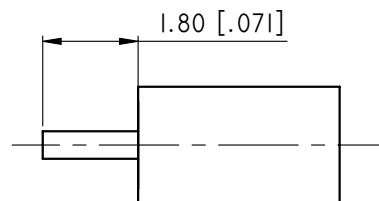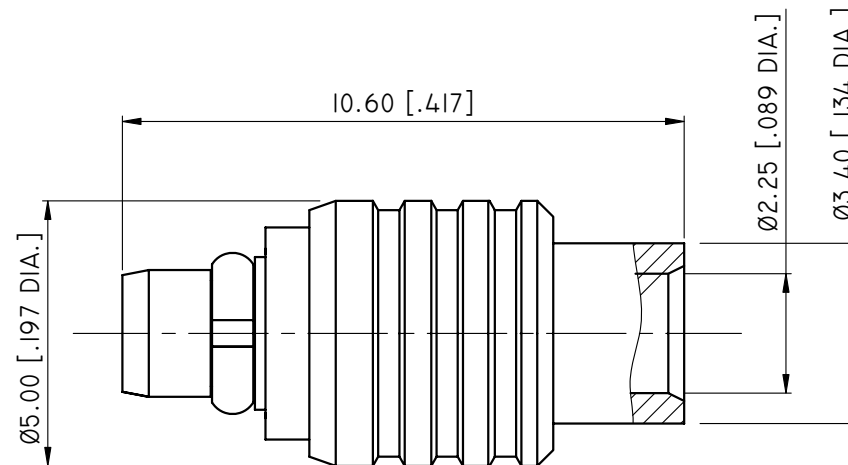

CABLE STRIPPING DIMENSIONS

DRAWN		L. YANG	DATE	03/12/15	 ...we create connection for technologies				
CHECKED		X. B. YANG	DATE	03/12/15					
APPROVED		J. QU	DATE	03/12/15					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD				
					TITLE				
					MMCX STRAIGHT MALE SOLDER FOR .086 CABLE				
					VIEW		PART NO.		
							ANO IIII-2032		
							SIZE	SCALE	SHEET
					A3	10:1	1/1	B	