

4

5

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 SHROUD: STAINLESS STEEL, GOLD PLATED
- 3 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 INSULATOR: PTFE





ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+165°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/23/24	J. Q

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-8.5 GHz

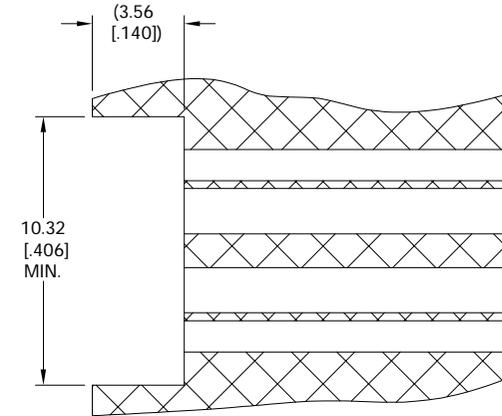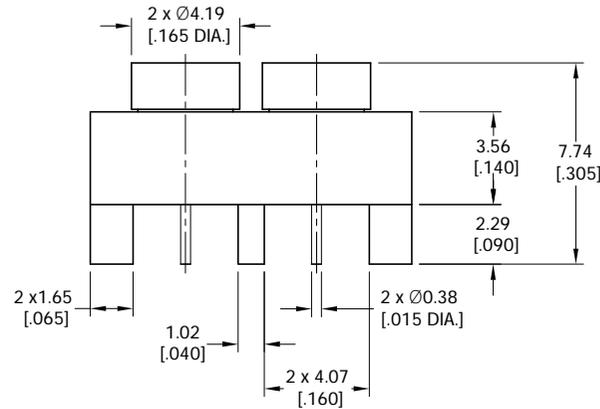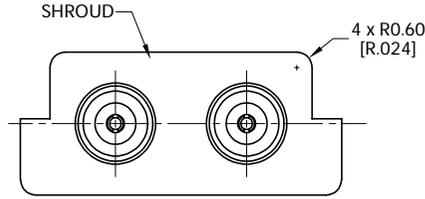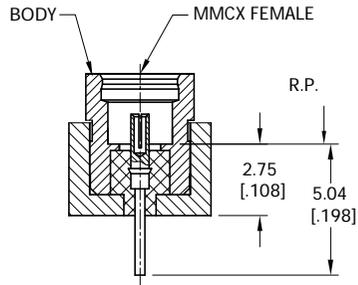

RECOMMENDED SOLDERING PADS

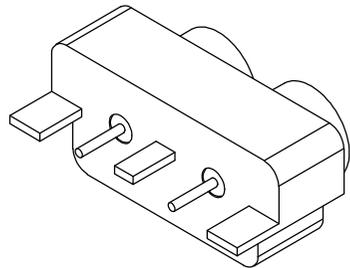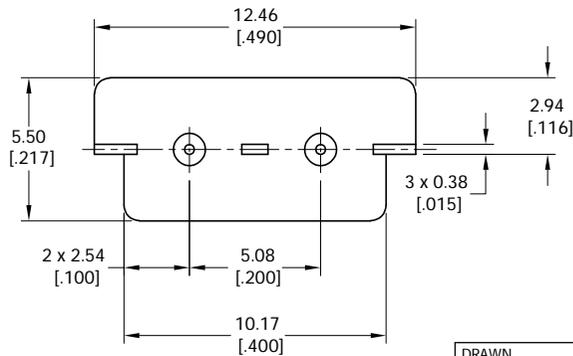

DRAWN	X. Y	DATE	12/23/24
CHECKED	W. Y	DATE	12/23/24
APPROVED	J. Q	DATE	12/23/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [005"]		
.X	±0.20 [008"]		
X	±0.50 [019"]		
.X°	±1°		
X°	±2°		



TITLE			
2-PORT, MMCX FEMALE END LAUNCH			
VIEW		PART NO.	
		ANO 1112-4043	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A

4

3

2

1