


| DESCRIPTION | MATERIAL | FINISH |
|----------------|------------------------|-----------|
| Center Contact | See Notes | Gold |
| Body | Brass | See Notes |
| Spring Latch | Beryllium Copper Alloy | See Notes |
| Crimp Ferrule | Brass | See Notes |
| Insulator | PTFE | — |

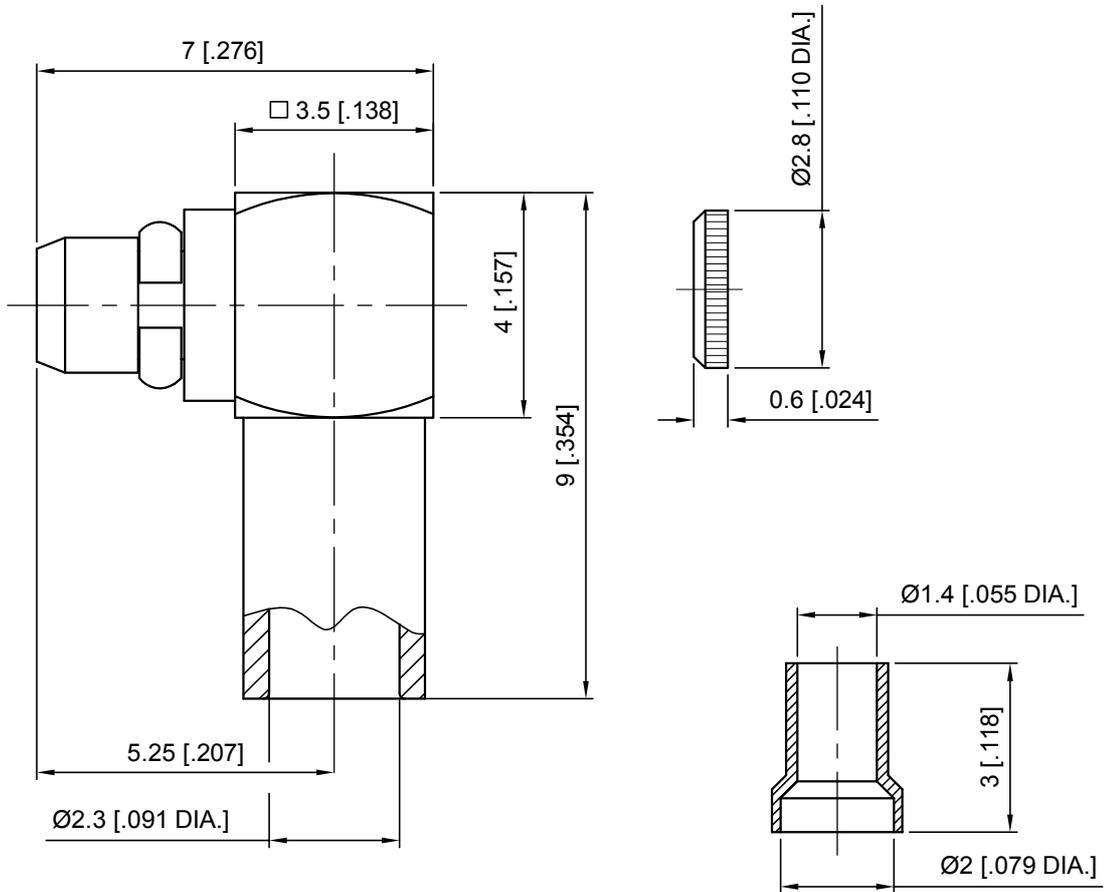


NOTES:

- ANO 1121-2022-1
Center Contact Material: Beryllium Copper Alloy
Body/Spring Latch/Crimp Ferrule Finish: Gold
- ANO 1121-2022-2
Center Contact Material: Beryllium Copper Alloy
Body/Spring Latch/Crimp Ferrule Finish: Nickel

- ANO 1121-2022-3
Center Contact Material: Beryllium Copper Alloy
Body/Spring Latch/Crimp Ferrule Finish: Albaloy
- ANO 1121-2022-4
Center Contact Material: Phosphor Bronze
Body/Spring Latch/Crimp Ferrule Finish: Gold
- ANO 1121-2022-5
Center Contact Material: Phosphor Bronze
Body/Spring Latch/Crimp Ferrule Finish: Nickel
- ANO 1121-2022-6
Center Contact Material: Phosphor Bronze
Body/Spring Latch/Crimp Ferrule Finish: Albaloy

CRIMP SIZES REQUIRED
FERRULE: 2.70 [.106]
HEX. CRIMP TOOL



CABLE STRIPPING DIMENSIONS

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| Description | Ecn.No | Date | Rev |
|------------------|--------|----------|-----|
| Material Changed | — | 07/20/11 | D |
| Material Changed | — | 07/18/11 | C |
| Material Changed | — | 07/08/11 | B |
| Release to Mfg. | — | 05/18/11 | A |

Drawn: Z. Shen 07/20/11
Checked: L. Yang 07/20/11
Approved: J. Qu 07/20/11

Title:
MMCX Right Angle Male Crimp for RG178 Cable



Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only.
Unless Otherwise Specified tolerance are:
.XX ±0.13 [.005"]
.X ±0.20 [.008"]
X ±0.50 [.019"]
.X° ±1°
X° ±2°

View:



Part No:

ANO 1121-2022

| Size: | Scale: | Sheet: | Rev: |
|-------|--------|--------|------|
| A4 | 8:1 | 1/1 | D |