

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 SPRING LATCH: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4 CRIMP FERRULE: COPPER, NICKEL PLATED
- 5 CAP: BRASS, GOLD PLATED
- 6 INSULATOR: PTFE





ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+155°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/09/16	J. QU

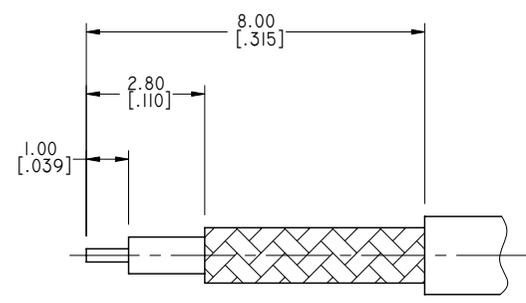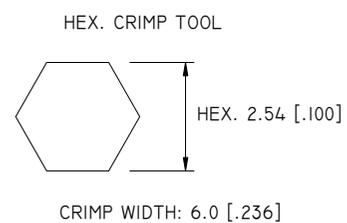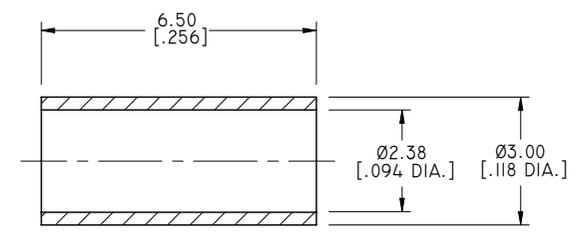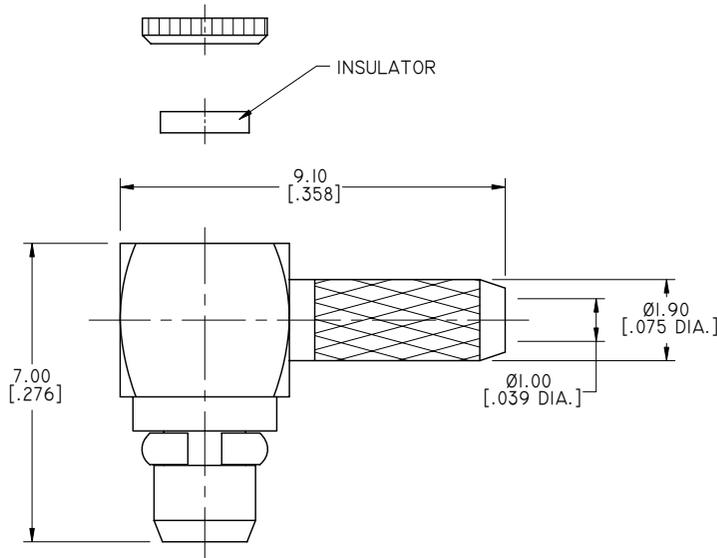

DRAWN	X. B. YANG	DATE	09/09/16
CHECKED	L. YANG	DATE	09/09/16
APPROVED	J. QU	DATE	09/09/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
MMCX RIGHT ANGLE MALE CRIMP FOR RG178 CABLE			
VIEW		PART NO.	
		ANO I121-2033	
SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	A