


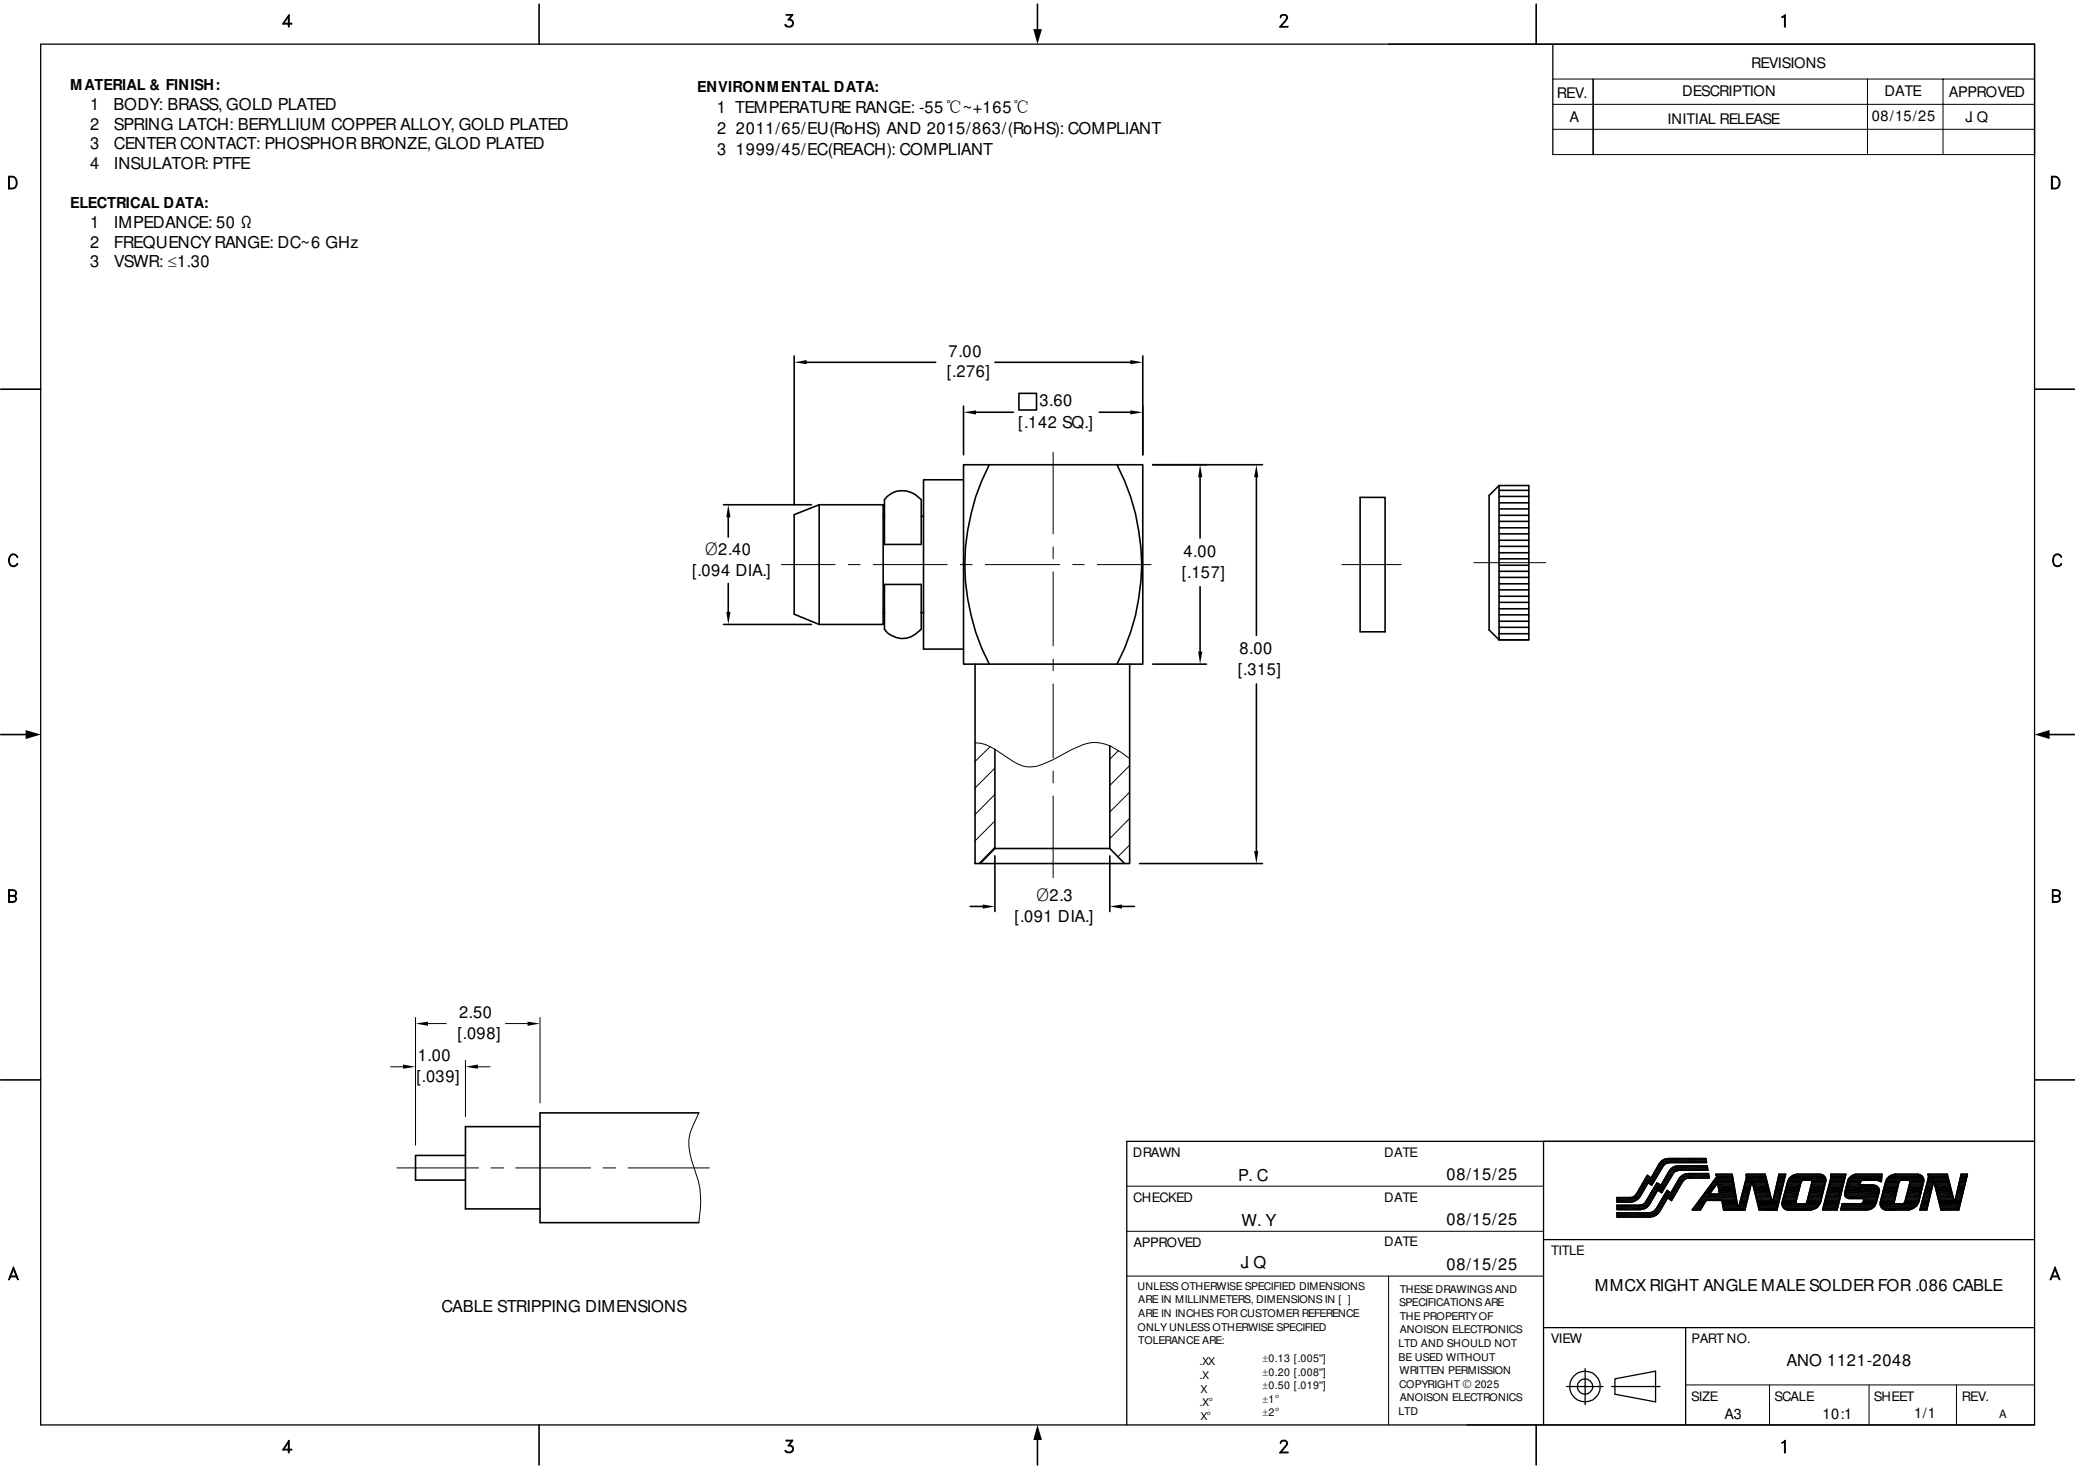

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 SPRING LATCH: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 CENTER CONTACT: PHOSPHOR BRONZE, GLOD PLATED
- 4 INSULATOR: PTFE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+165 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: ≤1.30

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/15/25	J Q

DRAWN		P. C		DATE		08/15/25											
CHECKED		W. Y		DATE		08/15/25											
APPROVED		J Q		DATE		08/15/25											
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: <table><tr><td>.XX</td><td>±0.13 [.005"]</td></tr><tr><td>.X</td><td>±0.20 [.008"]</td></tr><tr><td>X</td><td>±0.50 [.019"]</td></tr><tr><td>.X"</td><td>±1"</td></tr><tr><td>X"</td><td>±2"</td></tr></table>				.XX	±0.13 [.005"]	.X	±0.20 [.008"]	X	±0.50 [.019"]	.X"	±1"	X"	±2"	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD			
				.XX	±0.13 [.005"]												
				.X	±0.20 [.008"]												
				X	±0.50 [.019"]												
				.X"	±1"												
				X"	±2"												
TITLE																	
MMCX RIGHT ANGLE MALE SOLDER FOR .086 CABLE																	
VIEW		PART NO.															
		ANO 1121-2048															
		SIZE	SCALE	SHEET	REV.												
		A3	10:1	1/1	A												