

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 O-RING: SILICONE RUBBER

ENVIRONMENTAL DATA:



- 1 TEMPERATURE RANGE: -65°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.30 MAX.
- 4 INSERTION LOSS: 0.05x $\sqrt{F}$ (GHz) DB MAX.

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/23/22	J. QU

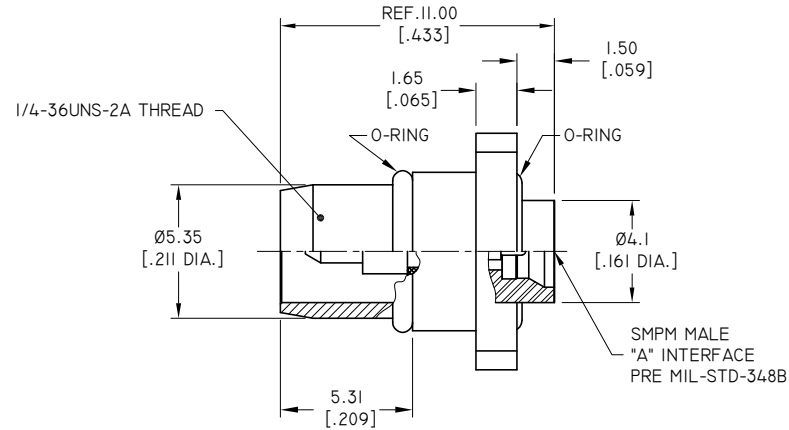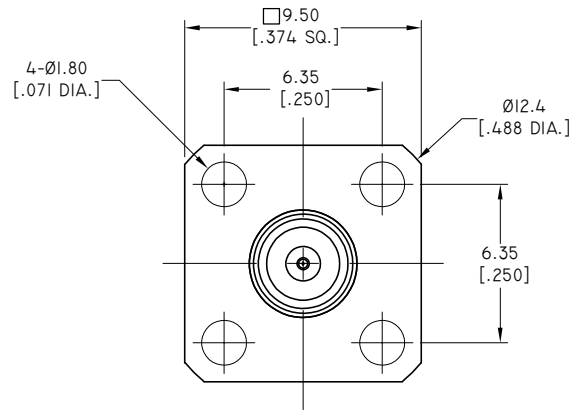

PART NO.	"A" INTERFACE
ANO 141-941-1588-1	FULL DETENT
ANO 141-941-1588-2	SMOOTH BORE

DRAWN		W. YANG		DATE		02/23/22	
CHECKED		X. B. YANG		DATE		02/23/22	
APPROVED		J. QU		DATE		02/23/22	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD			
.XX ±0.13 [.005"]				VIEW  PART NO. ANO 141-941-1588 SIZE A3 SCALE 5:1 SHEET 1/1 REV. A			
.X ±0.20 [.008"]							
X ±0.50 [.019"]							
±1°							
X° ±2°							

		ANOISON	
TITLE			
ADAPTER, BMA MALE 4 HOLE FLANGE MOUNT TO SMPM MALE			