

MATERIAL & FINISH:

- 1 BODY: SEE TABLE
- 2 CENTER CONTACT: SEE TABLE
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: SEE TABLE
- 5 GASKET: SILICONE RUBBER

ENVIRONMENTAL DATA:



- 1 TEMPERATURE RANGE: -55℃~+125℃
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.10 MAX. AT DC~6 GHz
1.15 MAX. AT 6~12.4 GHz
1.20 MAX. AT 12.4~18 GHz


REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/25/17	J. QU

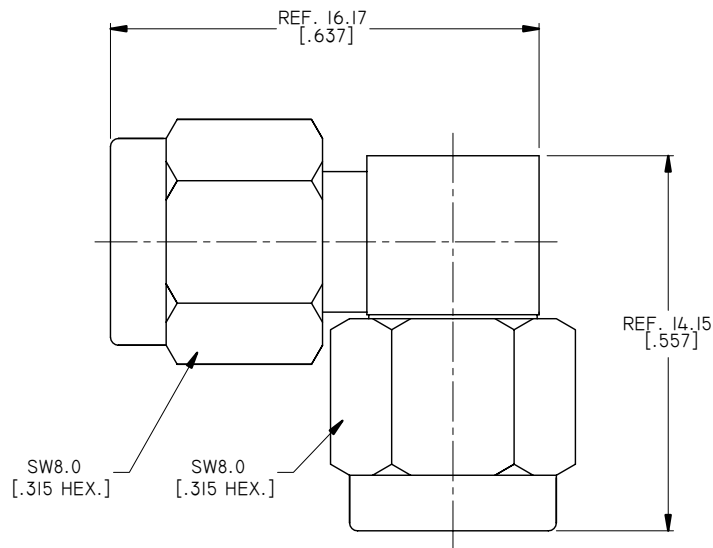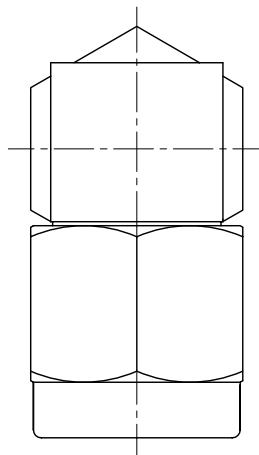

TABLE

PART NO.	PART	MATERIAL	FINISH
ANO 211-211-2430	BODY/COUPLING NUT	BRASS	ALBALOY
	CENTER CONTACT	BERYLLIUM COPPER ALLOY	SILIVER
ANO 211-211-2430-1	BODY/COUPLING NUT	STAINLESS STEEL	PASSIVATED
	CENTER CONTACT	BERYLLIUM COPPER ALLOY	GOLD

DRAWN X. B. YANG	DATE 10/25/17				
CHECKED P. CHEN	DATE 10/25/17				
APPROVED J. QU	DATE 10/25/17				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD			
VIEW 		TITLE ADAPTER, RIGHT ANGLE SMA MALE TO SMA MALE			
PART NO. ANO 211-211-2430		SIZE A3	SCALE 5:1	SHEET 1/1	REV. A