


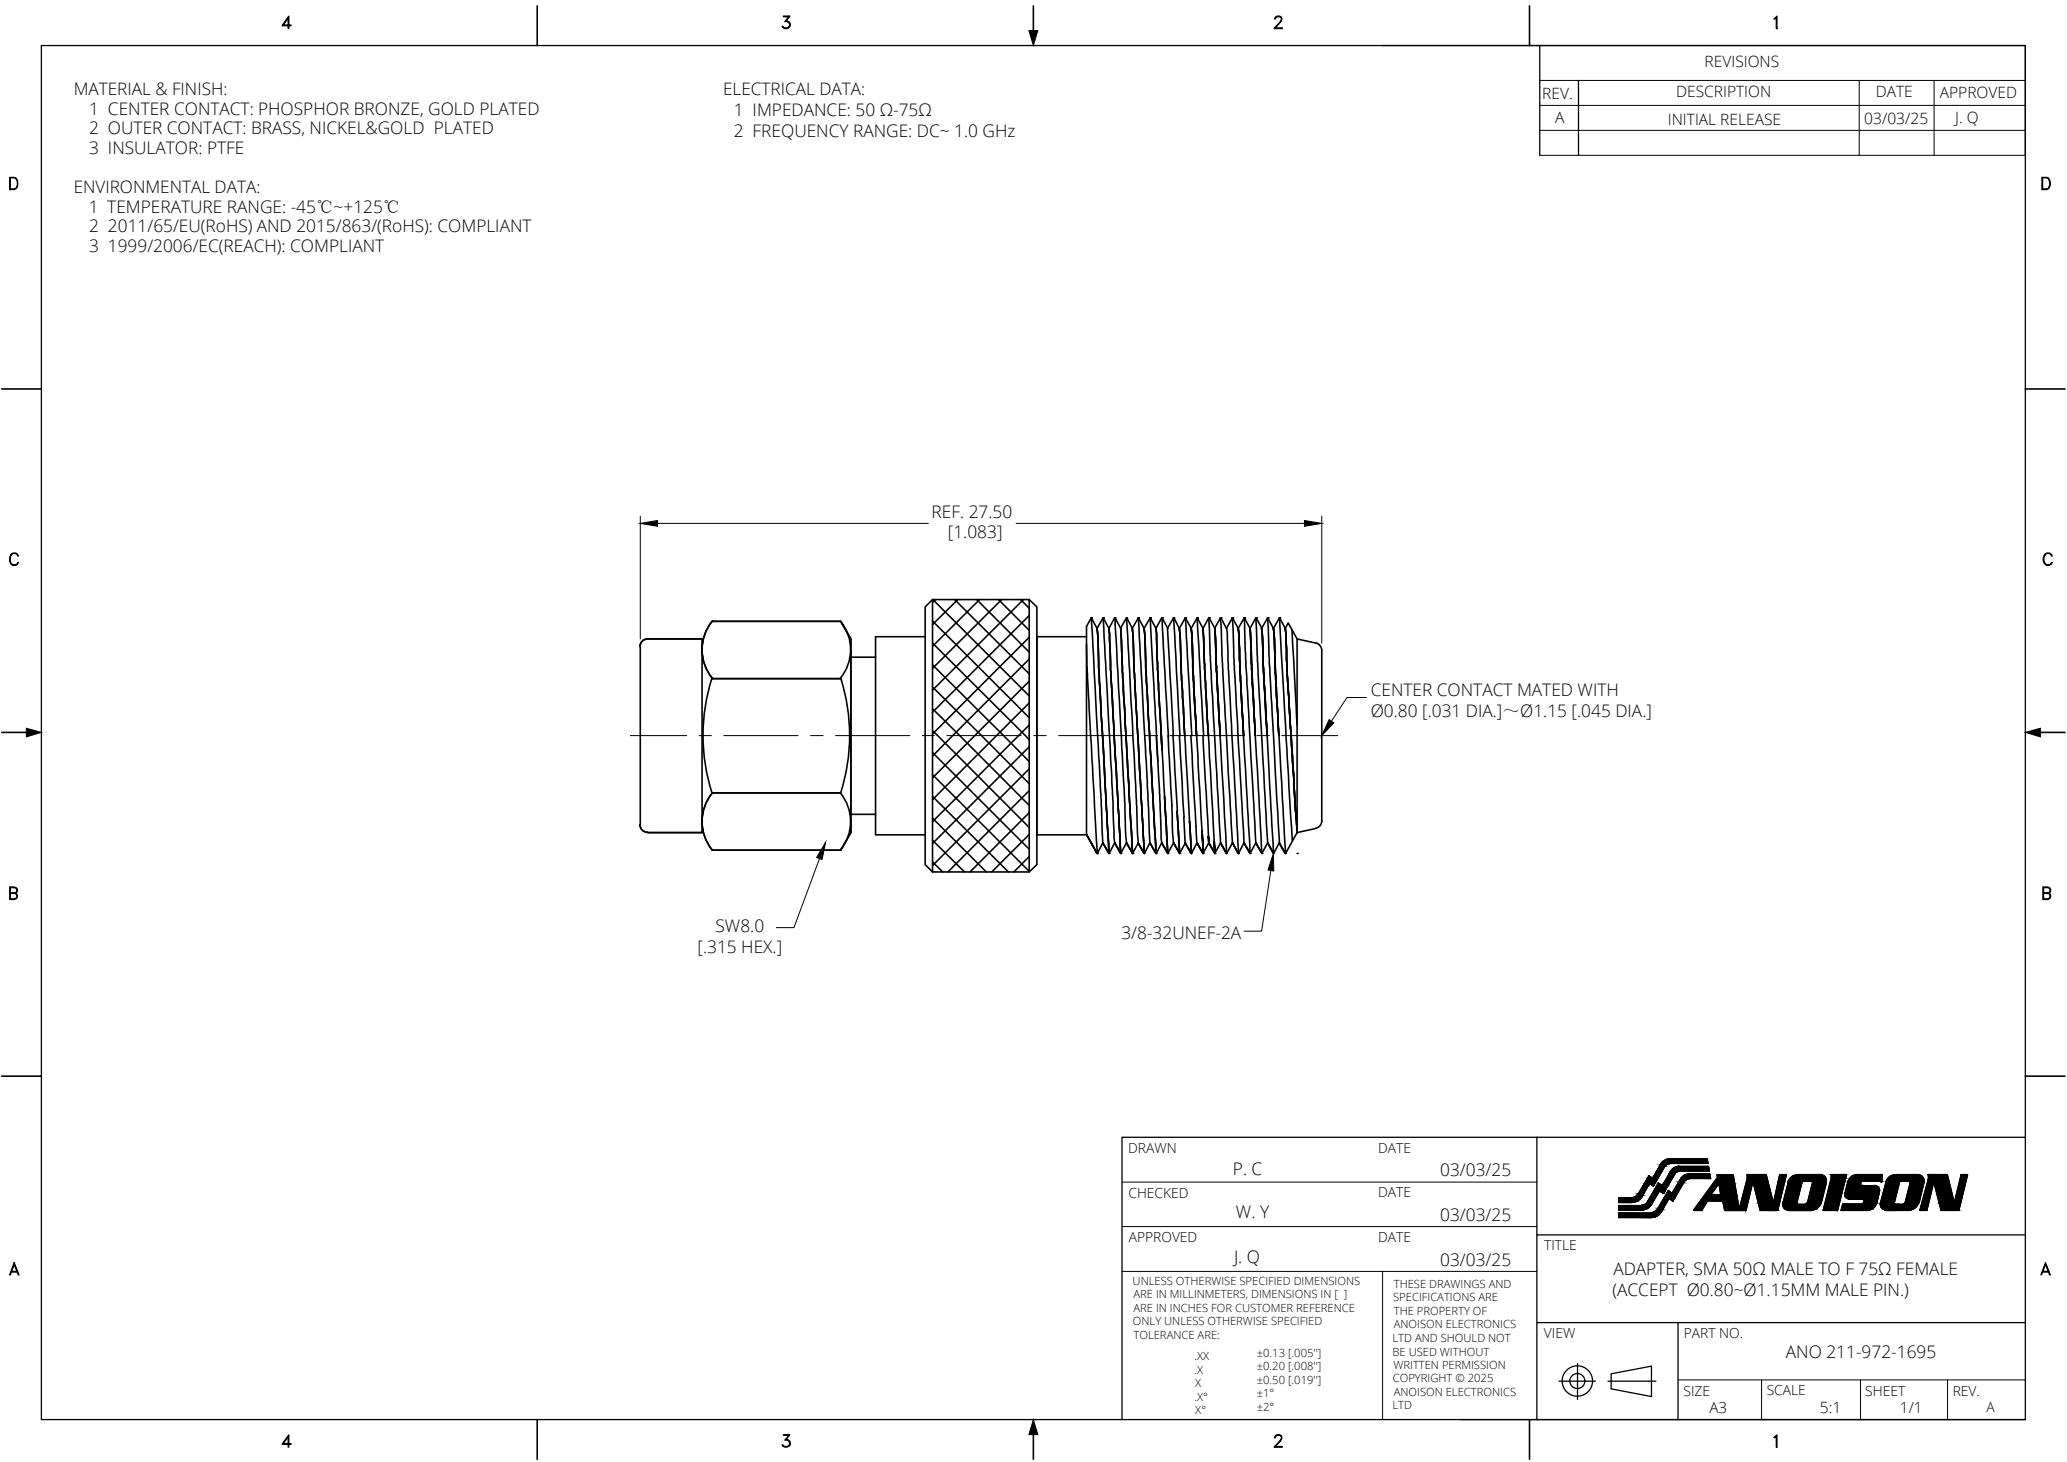



MATERIAL & FINISH:
1 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
2 OUTER CONTACT: BRASS, NICKEL&GOLD PLATED
3 INSULATOR: PTFE

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -45°C~+125°C
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/2006/EC(REACH): COMPLIANT

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω-75Ω
2 FREQUENCY RANGE: DC~ 1.0 GHz

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/03/25	J. Q

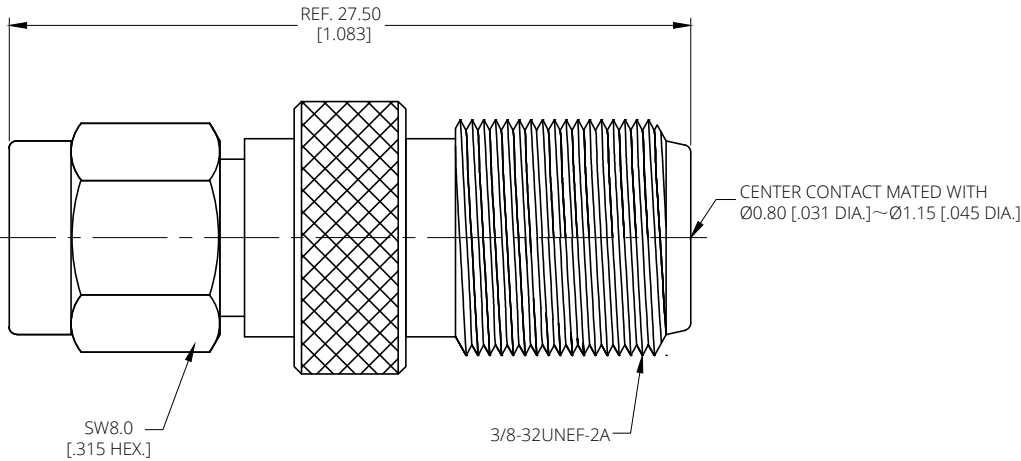

DRAWN	P. C	DATE	03/03/25				
CHECKED	W. Y	DATE	03/03/25				
APPROVED	J. Q	DATE	03/03/25				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				TITILE ADAPTER, SMA 50Ω MALE TO F 75Ω FEMALE (ACCEPT Ø0.80~Ø1.15MM MALE PIN.)			
XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°				PART NO. ANO 211-972-1695			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD				VIEW 	SIZE A3	SCALE 5:1	SHEET 1/1
				REV. A			