

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 5 SOLDER FERRULE: BRASS, GOLD PLATED

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-26.5 GHZ
- 3 VSWR: 1.25 MAX.



MECHANICAL DATA:

- 1 MECHANICAL DURABILITY: 500 CYCLES MIN.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/18/19	J. QU

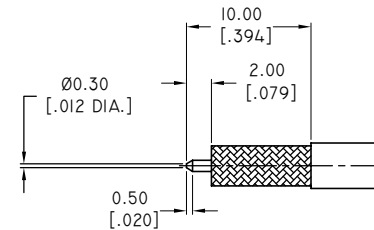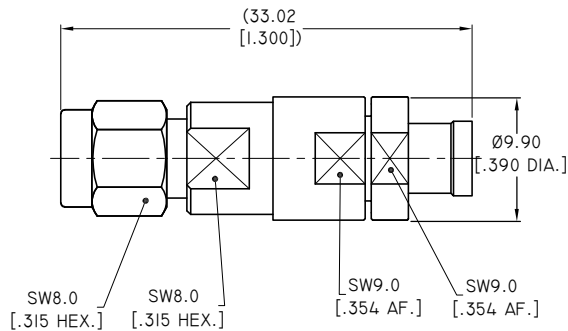

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	10/18/19	
CHECKED	L. YANG	DATE	10/18/19	
APPROVED	J. QU	DATE	10/18/19	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD		
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] X* ±1° X* ±2°		VIEW	PART NO. ANO 2111-2536	
			SIZE A3	SCALE 2.5:1
			SHEET 1/1	REV. A

4

3

2

1