

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR I: PTFE
- 4 INSULATOR 2: GLASS CORNING 7070
- 5 HERMETICALLY SEALED: KOVAR, GOLD PLATED



ELECTRICAL SPECIFICATIONS:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18GHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C~+165°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT
- 4 INGRESS PROTECTION (IP) RATING: IP67

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/02/19	J. QU

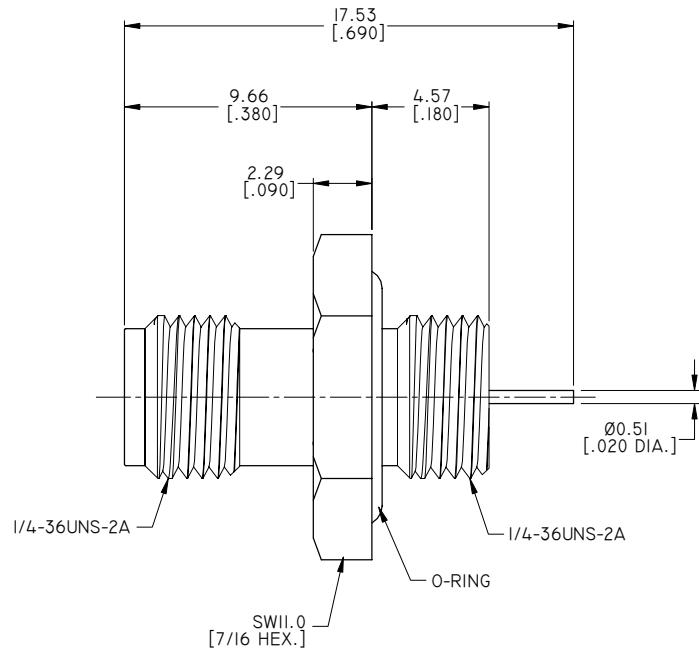

DRAWN	X. B. YANG	DATE	08/02/19
CHECKED	P. CHEN	DATE	08/02/19
APPROVED	J. QU	DATE	08/02/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
SMA FEMALE BULKHEAD MOUNT HERMETICALLY SEALED CONNECTOR SOLDER ATTACHMENT STUB TERMINAL .250 INCH DIAMETER, FRONT MOUNT IP67 RATED

VIEW	PART NO. ANO 2112-5539		
SIZE A3	SCALE 5:1	SHEET 1/1	REV. A