

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, GOLD PLATED
- 5 GASKET: SILICONE RUBBER

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 WORKING VOLTAGE 335 V RMS MAX. @ SEA LEVEL
- 3 INSULATION RESISTANCE: 5K MOHMS MIN.

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/20/19	J. QU

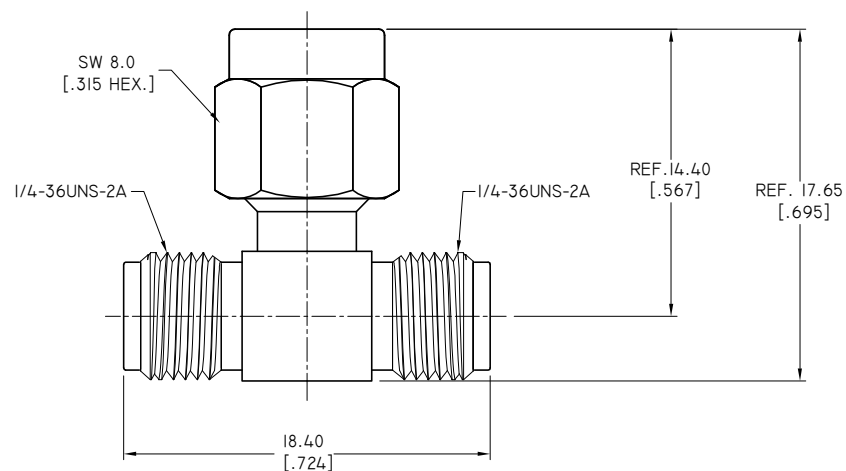

DRAWN	X. B. YANG	DATE	06/20/19
CHECKED	W. YANG	DATE	06/20/19
APPROVED	J. QU	DATE	06/20/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX ±0.13 [.005"]		 ...we create connection for technologies	
.X ±0.20 [.008"]			
X ±0.50 [.019"]			
±1°			
±2°			
TITLE			
TEE ADAPTER, SMA FEMALE TO MALE TO FEMALE			
VIEW		PART NO.	
 		ANO 212-211-2122	
		SIZE	A3
		SCALE	4:1
		SHEET	1/1
		REV.	A