



1.0 MATERIAL & FINISH
1.1 BODY: STAINLESS STEEL, PASSIVATED
1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
1.3 INSULATOR: PTFE
1.4 COUPLING NUT: STAINLESS STEEL, PASSIVATED

2.0 ENVIRONMENTAL DATA:
2.1 TEMPERATURE RANGE: -55°C~+125°C
2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL DATA:
3.1 IMPEDANCE: 50 OHMS
3.2 FREQUENCY RANGE: DC~27 GHz
3.3 VSWR: 1.15 MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/19/15	J. QU

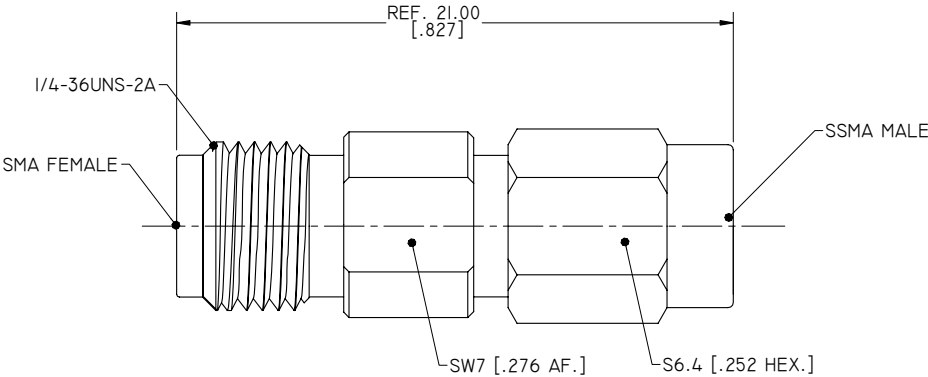

DRAWN	L. YANG	DATE	09/19/15				
CHECKED	P. CHEN	DATE	09/19/15				
APPROVED	J. QU	DATE	09/19/15				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD			
TITLE				ADAPTER, SMA FEMALE TO SSMA MALE			
VIEW		PART NO.		ANO 212-911-1160			
		SIZE	A3	SCALE	5:1	SHEET	1/1
						REV.	A