

1.0 MATERIAL & FINISH:

- 1.1 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
1.2 INSULATOR: PTFE
1.3 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED


2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+155°C
2.2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
1999/45/EC(REACH): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 IMPEDANCE: 50 Ω
3.2 FREQUENCY RANGE: DC~3GHz
3.3 VSWR: 1.10 MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/11/19	J. QU

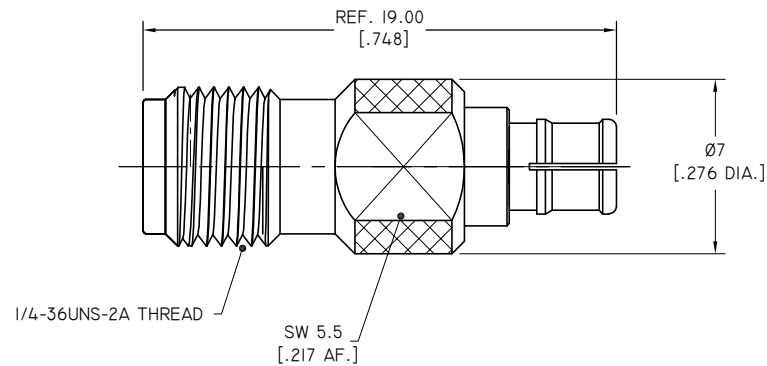

DRAWN		DATE		 ...we create connection for technologies								
W. YANG		04/11/19										
CHECKED		DATE										
X. B. YANG		04/11/19		TITLE ADAPTER, SMA FEMALE TO SMP-MAX FEMALE								
APPROVED		DATE										
J. QU		04/11/19										
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD			VIEW							
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°					PART NO. ANO 212-922-1435							
					SIZE A3		SCALE 5:1		SHEET 1/1		REV. A	