

MATERIAL & FINISH

1.0 MATERIAL & FINISH

- 1.1 BODY: STAINLESS STEEL,PASSIVATED
1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
1.3 INSULATOR: PTFE,PEI

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -65 °C~+165 °C
2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 OHMS
2 FREQUENCY RANGE: DC~26.5 GHZ
3 VSWR: 1.20 MAX. AT DC~18 GHZ
1.30 MAX. AT 18 GHZ~26.5 GHZ

REVISIONS


REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/07/18	J. QU

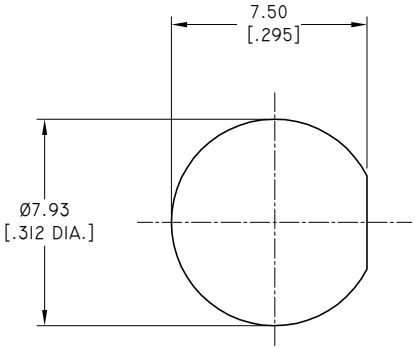

RECOMMENDED PANEL MOUNT

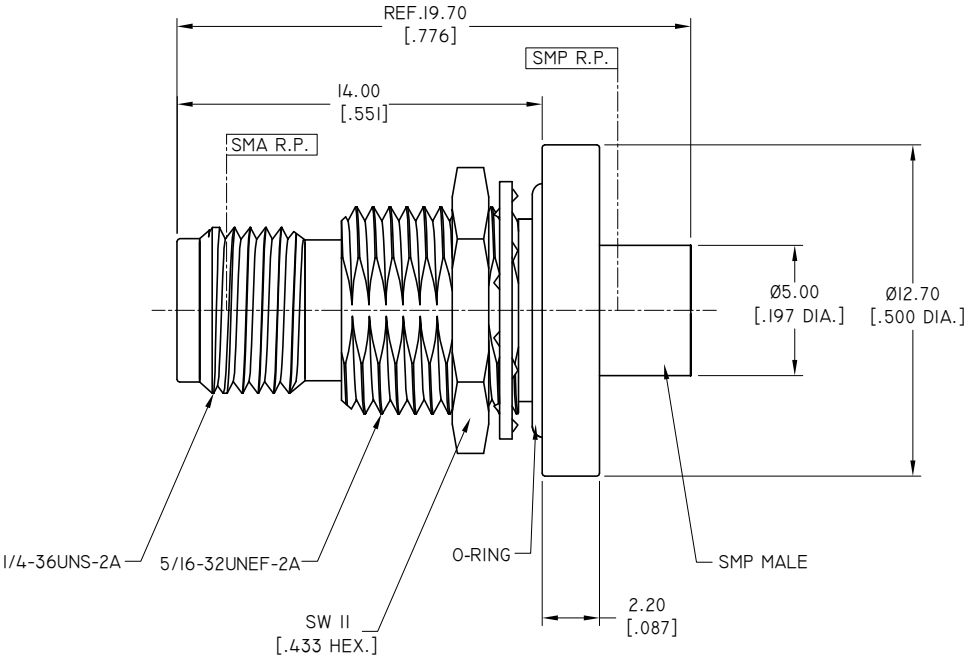

PART NUMBER	SMP MALE INTERFACE
ANO 212-931-1444-1	FULL DETENT
ANO 212-931-1444-2	LIMITED DETENT
ANO 212-931-1444-3	SMOOTH BORE

DRAWN P. CHEN	DATE 03/07/18	 ...we create connection for technologies			
CHECKED L. YANG	DATE 03/07/18				
APPROVED J. QU	DATE 03/07/18				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD			
VIEW 		TITLE ADAPTER, SMA BULKHEAD WATERPROOF FEMALE TO SMP MALE			
SIZE A3		SCALE 5:1	SHEET 1/1	REV. A	