


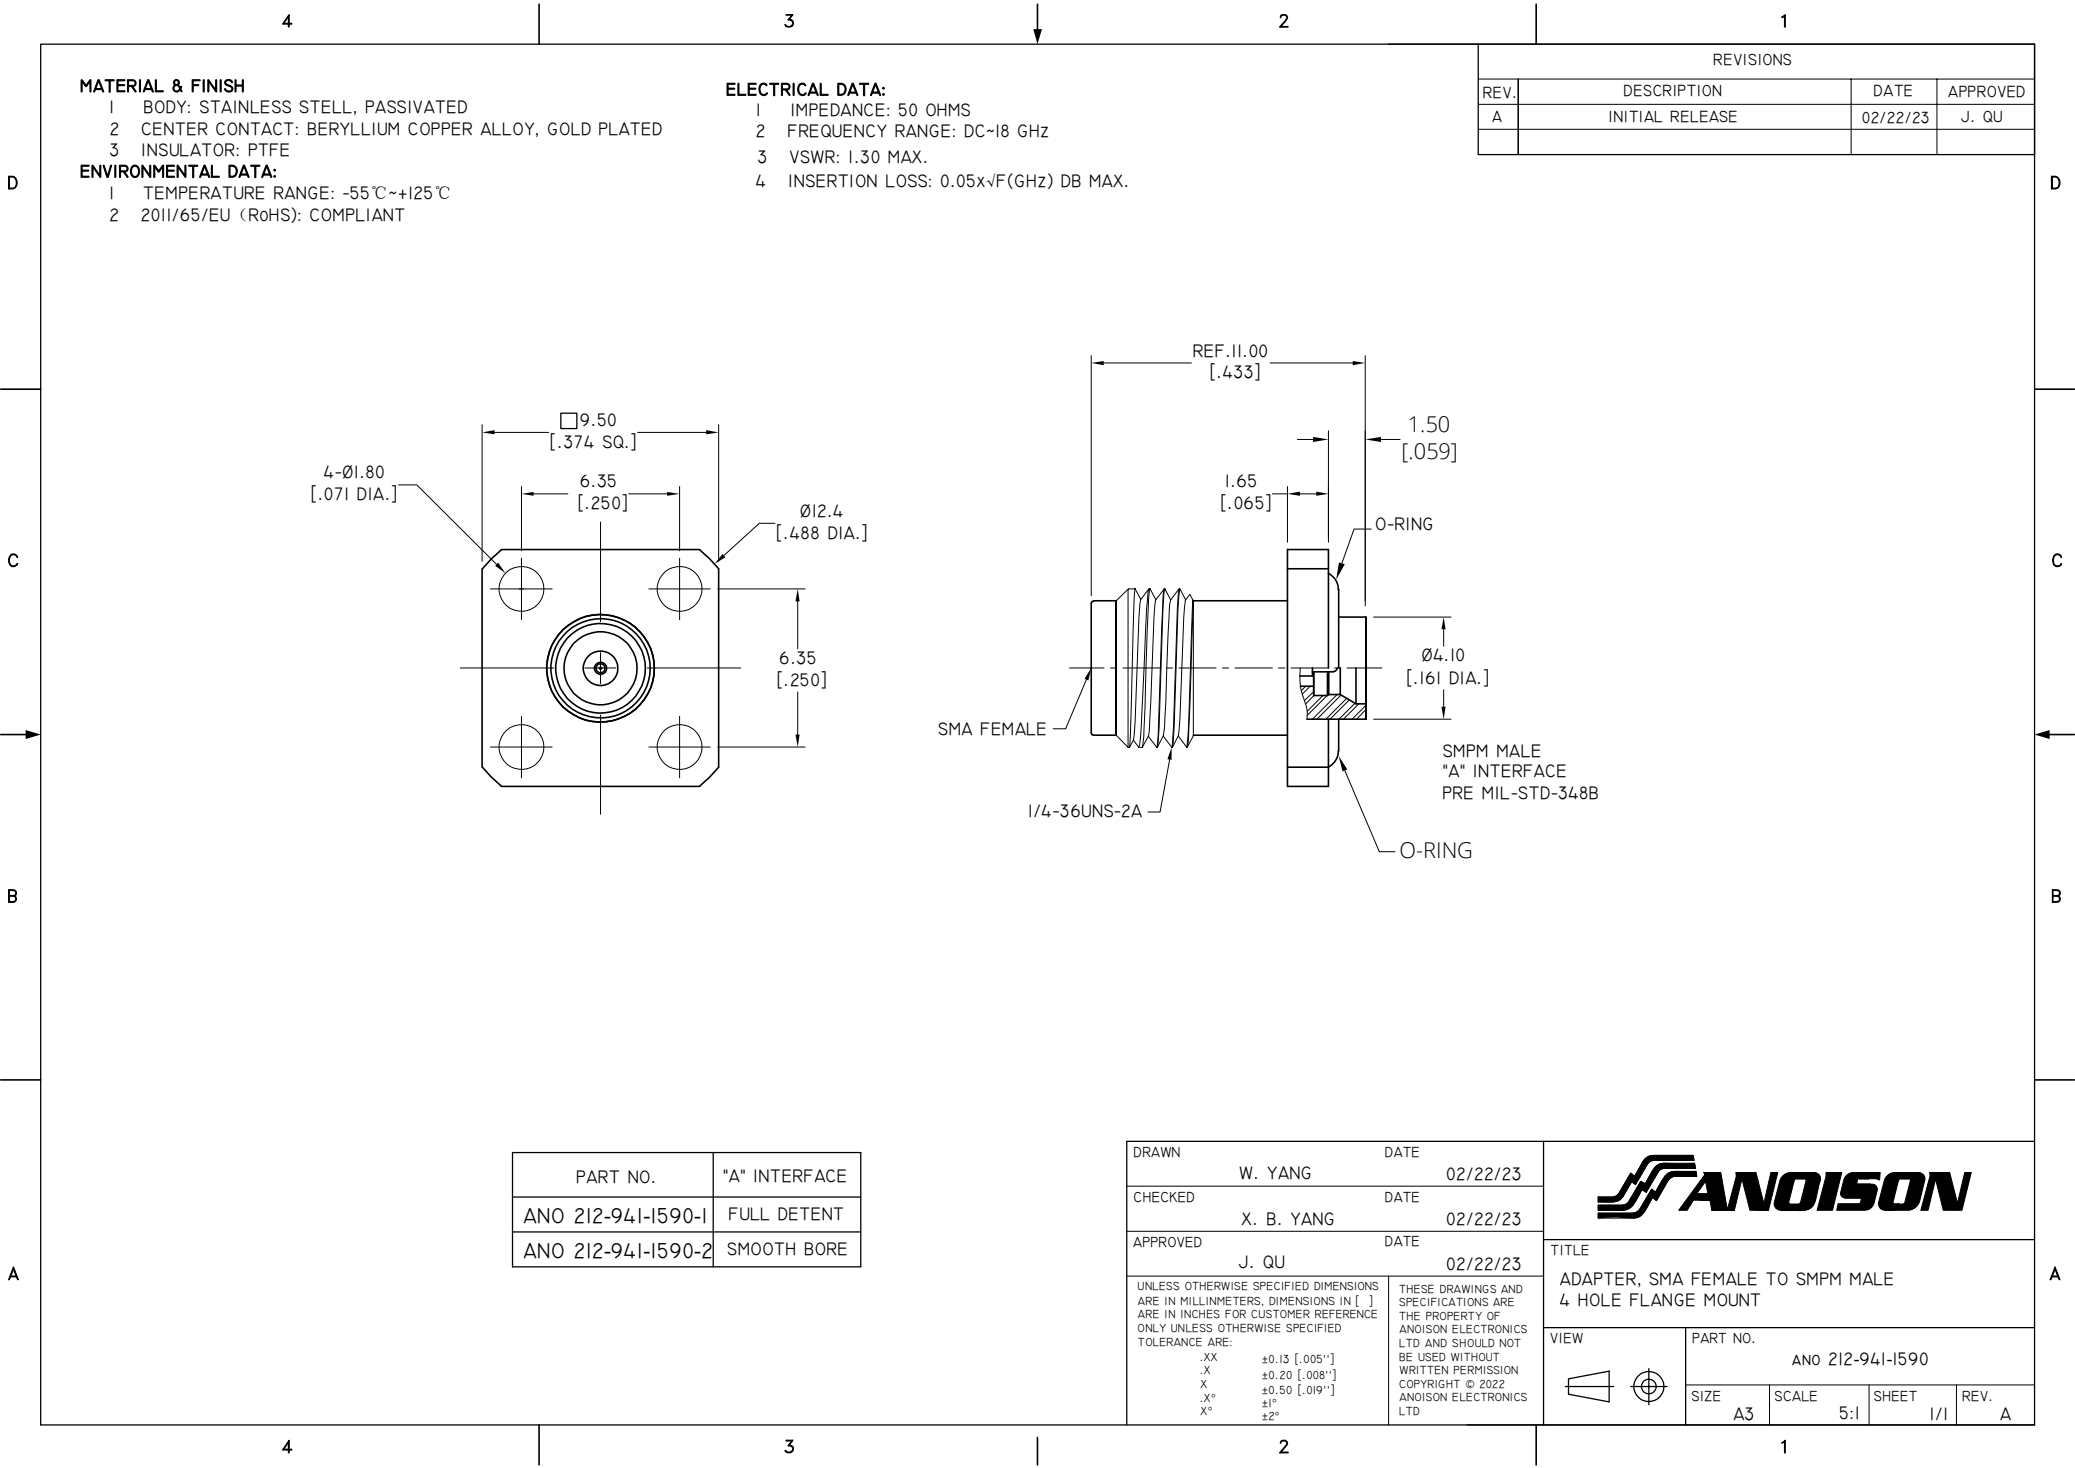

MATERIAL & FINISH

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.30 MAX.
- 4 INSERTION LOSS: 0.05x√F(GHz) DB MAX.

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/22/23	J. QU

PART NO.	"A" INTERFACE
ANO 212-941-I590-1	FULL DETENT
ANO 212-941-I590-2	SMOOTH BORE

DRAWN	W. YANG	DATE	02/22/23
CHECKED	X. B. YANG	DATE	02/22/23
APPROVED	J. QU	DATE	02/22/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD	
.XX		±0.13 [.005"]	
.X		±0.20 [.008"]	
X		±0.50 [.019"]	
X°		±1°	
X°		±2°	



TITLE ADAPTER, SMA FEMALE TO SMPM MALE 4 HOLE FLANGE MOUNT			
VIEW 		PART NO. ANO 212-941-I590	
SIZE A3	SCALE 5:1	SHEET 1/1	REV. A