

4 3 2 1

MATERIAL & FINISH

- 1 BODY: STAINLESS STEEL, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: STAINLESS STEEL, PASSIVATED


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~26.5 GHz
- 3 PHASE DEVIATION: ±1.5°

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/12/18 | J. QU |
| | | | |

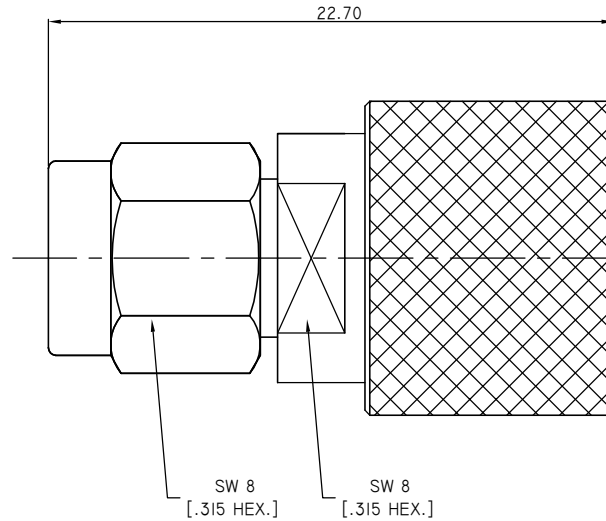

| | | | |
|---|---------------|--|----------|
| DRAWN | W. YANG | DATE | 11/12/18 |
| CHECKED | X. B. YANG | DATE | 11/12/18 |
| APPROVED | J. QU | DATE | 11/12/18 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD | |
| .XX | ±0.08 [.003"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| X° | ±1° | | |
| X" | ±2° | | |

TITLE
3.5MM MALE SHORT

VIEW

PART NO. ANO 251-801

| | | | |
|-------------------|-----------------------|---------------------|------------------|
| SIZE A3 | SCALE 2.5:1 | SHEET 1/1 | REV. A |
|-------------------|-----------------------|---------------------|------------------|

4 3 2 1