


1.0 MATERIAL & FINISH:
1.1 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
1.2 INSULATOR: PTFE
1.3 BODY: BRASS, ALBALOY PLATED
1.4 COUPLING NUT: BRASS, ALBALOY PLATED

2.0 ENVIRONMENTAL DATA:
2.1 TEMPERATURE RANGE: -55℃~+85℃
2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:
3.1 IMPEDANCE: 50 Ω
3.2 FREQUENCY RANGE: DC~18GHz
3.3 VSWR: 1.15 MAX.@ DC~6GHz

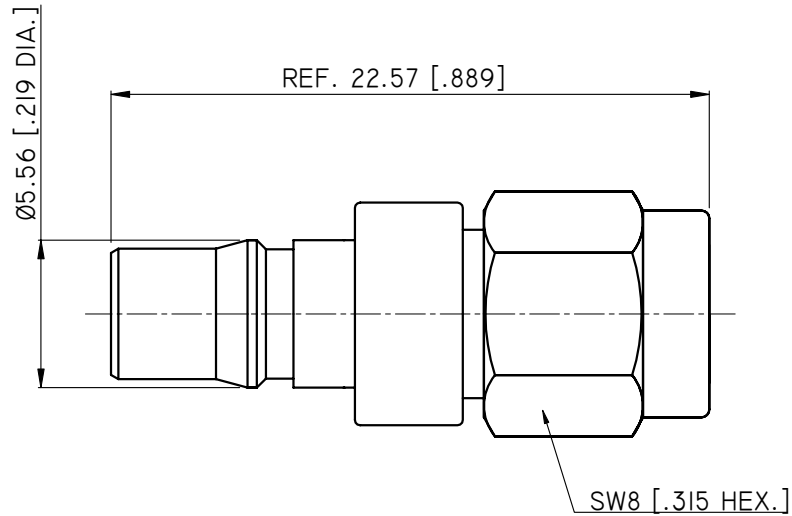

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/24/12	J. QU

DRAWN X. B. YANG		DATE 07/24/12		 ...we create connection for technologies			
CHECKED L. YANG		DATE 07/24/12					
APPROVED J. QU		DATE 07/24/12					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2012 ANOISON ELECTRONICS LTD			
TITLE ADAPTER, QMA FEMALE TO SMA MALE							
VIEW 		PART NO. ANO 262-211-1032					
SIZE A3		SCALE 5:1		SHEET 1/1		REV. A	