


1. BODY: SEE TABLE I
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PTFE
4. WASHER: PHOSPHOR BRONZE, ALBALOY PLATED
5. FASTENING NUT: BRASS, ALBALOY PLATED
6. O-RING: MVQ(SILICONE RUBBER)

1. TEMPERATURE RANGE: -55 °C ~ +85 °C
2. 2002/95/EC (RoHS): COMPLIANT

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~18GHZ
3. RETRUN LOSS:
 >33 DB AT DC TO 2.5GHZ
 >25 DB AT 2.5 TO 6GHZ
 >18 DB AT 6 TO 18GHZ

PART NO.	PART	MATERIAL	FINISH
ANO 262-212-1070	BODY	STAINLESS STEEL	PASSIVATED
ANO 262-212-1070-I		BRASS	ALBALOY

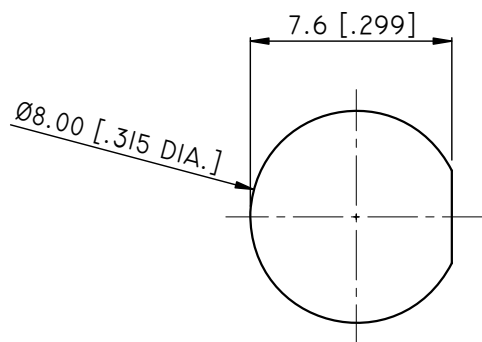

Technical drawing of the front view of a pump assembly. The drawing shows a central shaft with a pump head on the left and a motor on the right. The pump head has a flange with an O-ring. The motor has a hexagonal base. Dimensions are given in inches and millimeters. The total length is 25.7 [1.012]. The distance from the pump head to the motor is 14.2 [.559]. The distance from the pump head to the O-ring is 2.2 [.087]. The distance from the O-ring to the motor is 4.8 [.189] MAX. The pump head diameter is Ø12.70 [.500 DIA.]. The motor base is 1/4-36UNS-2A. The motor base is 5/16-32 UNEF-2A. The motor base is SW 11.00 [.433 HEX.]. The O-ring is labeled O-RING.

DRAWN		DATE		 ...we create connection for technologies									
X. B. YANG		02/19/14											
CHECKED		DATE											
L. YANG		02/19/14		TITLE ADAPTER QMA FEMALE TO SMA WATERPROOF BULKHEAD FEMALE									
APPROVED		DATE											
J. QU		02/19/14											
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2013 ANOISON		VIEW									
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°				PART NO. ANO 262-212-I070		SIZE A3		SCALE 5:1		SHEET I/I		REV. F	