


DESCRIPTION	MATERIAL	FINISH
Center Contact	Beryllium Copper Alloy	Gold
Body	See Schedule	See Schedule
Coupling Nut	See Schedule	See Schedule
Insulator	PEI/ PPO	———

Technical Data

1. Impedance: 50 Ω
2. Temp. range: -55~+165 °C
3. Frequency range: DC~40GHz
4. VSWR: 1.15 typ.
5. Insert Loss: 0.30 dB max.
6. Durability: 500 Cycles

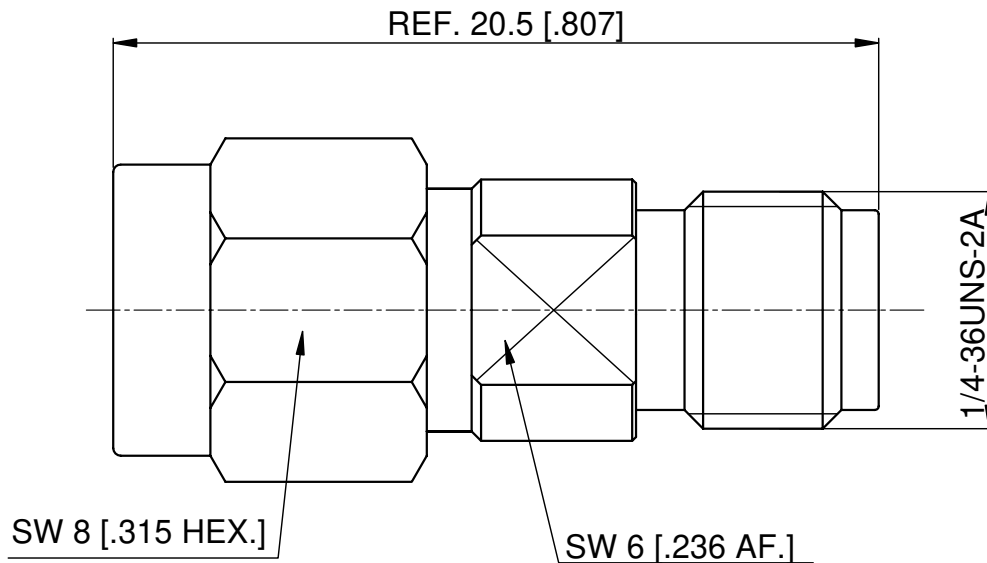

Part	Material & Finish	Part Number
Body/Coupling Nut	Brass, Gold	ANO 291-292-1139-1
Body/Coupling Nut	Brass, Gold/ Stainless Steel, Passivated	ANO 291-292-1139-2

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

				Drawn: L. Yang 10/25/11	Title: Adapter, 2.92mm Male to 2.92mm Female	
				Checked: X. B. Yang 10/25/11		
Description	Ecn.No	Date	Rev	Approved: J. Qu 10/25/11		
 www.anoison.com				Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	View: 	Part No: ANO 291-292-1139
				Size: A4	Scale: 5:1	Sheet: 1/1