

4

3

2

1

MATERIAL & FINISH

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 GASKET: SILICONE RUBBER

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~11 GHZ
- 3 VSWR: 1.20 MAX. AT DC~6 GHZ
1.30 MAX. AT 6~11 GHZ


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55℃~+125℃
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/17/12	J. QU
B	OUTLINE DRAWING CHANGED	07/20/17	J. QU

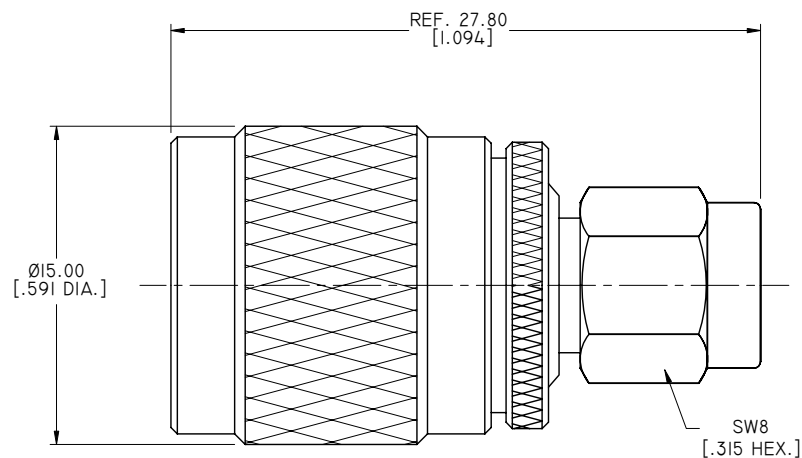

DRAWN		DATE		 ...we create connection for technologies	
X. B. YANG		07/20/17			
CHECKED		DATE			
P. CHEN		07/20/17		TITLE	
APPROVED		DATE			
J. QU		07/20/17			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD		ADAPTER, TNC MALE TO SMA MALE	
.XX ±0.13 [.005"]				VIEW	
.X ±0.20 [.008"]				PART NO.	
X ±0.50 [.019"]				ANO 331-211-1181	
.X° ±1°				SIZE	
X° ±2°				SCALE	
		A3		4:1	
				SHEET	
				1/1	
				REV.	
				B	

4

3

2

1