

MATERIAL & FINISH

- 1. BODY: BRASS, NICKEL PLATED
- 2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3. FASTENING NUT: BRASS, NICKEL PLATED
- 4. LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 5. INSULATOR: PTFE
- 6. O-RING: MVQ(SILICONE RUBBER)


ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -45°C~+85°C
- 2. 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/29/16	J. QU
B	TRB WAS TRIAX BNC	03/21/16	J. QU

ELECTRICAL SPECIFICATIONS:

- 1. WORKING VOLTAGE: 800 VRMS
- 2. FREQUENCY RANGE: DC~1000 MHZ

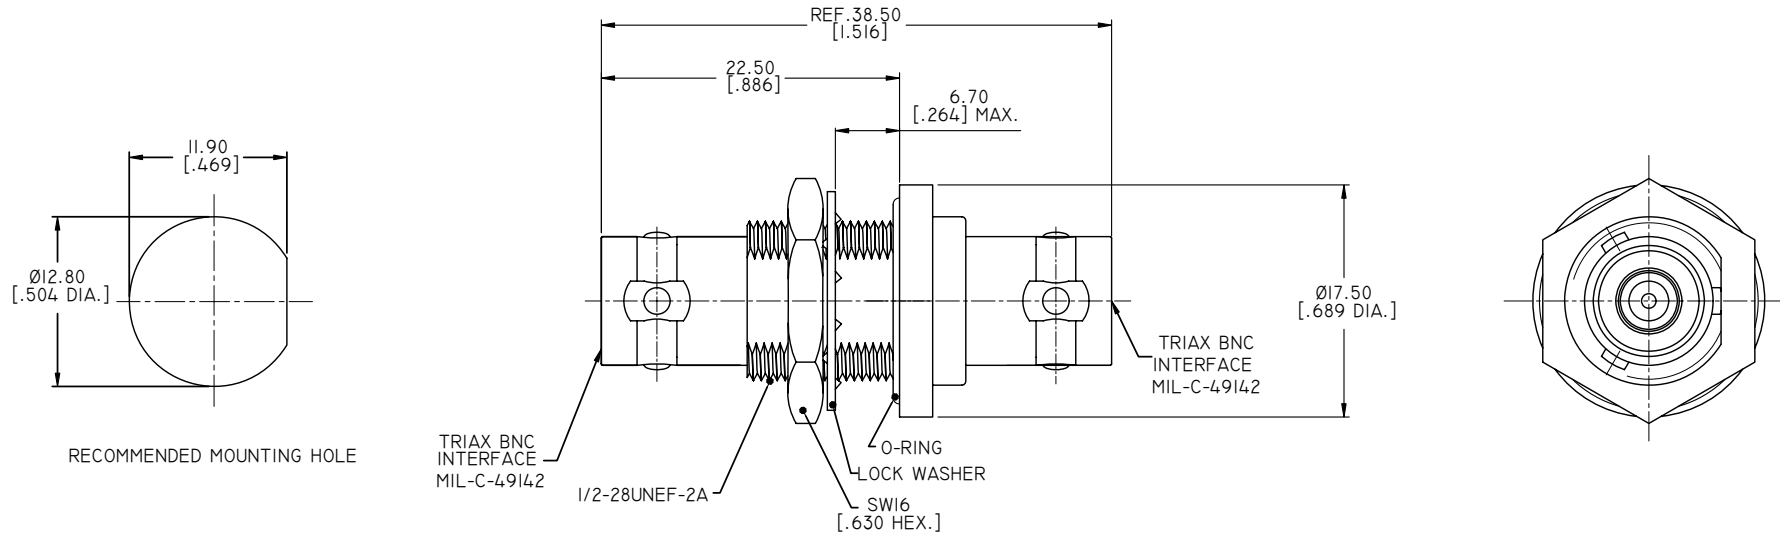

DRAWN	P. CHEN	DATE	03/21/16
CHECKED	L. YANG	DATE	03/21/16
APPROVED	J. QU	DATE	03/21/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
ADAPTER, TRB FEMALE BULKHEAD WATERPROOF TO TRB FEMALE			
VIEW		PART NO.	
		ANO 422-422-1366	
SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	B