

D

D

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: NICKEL, NICKEL PLATED
- 5 GASKET: SILICONE RUBBER

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU (RoHS): COMPLIANT


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.10 MAX. AT DC~3 GHz
1.20 MAX. AT 3~6 GHz
1.35 MAX. AT 6~18 GHz
- 4 WITHSTANDING VOLTAGE: 2500 VRMS MIN.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/08/15	J. QU
B	35.30 [1.390] WAS 39.20 [1.543]	06/05/17	J. QU
C	VSWR ADDED	08/15/22	J. QU

C

C

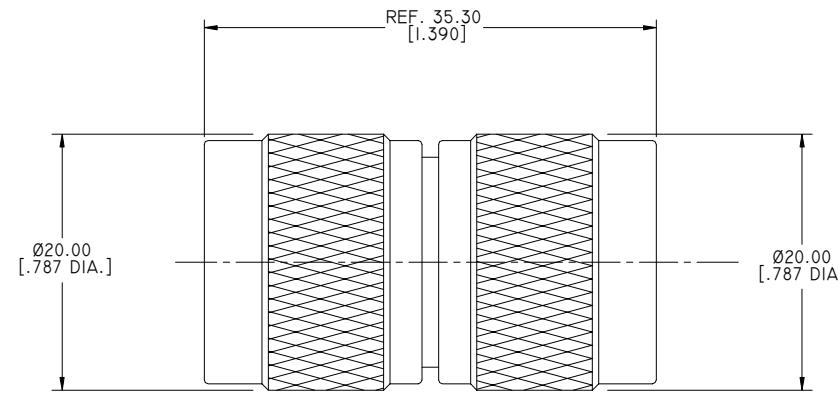

B

B

A

A

DRAWN X. Y DATE 08/15/22
 CHECKED L. Y DATE 08/15/22
 APPROVED J. Q DATE 08/15/22

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	± 0.13 [.005"]
.X	± 0.20 [.008"]
.X°	$\pm 1°$
X°	$\pm 2°$

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. COPYRIGHT © 2022 ANOISON ELECTRONICS LTD

ADAPTER, N MALE TO N MALE



PART NO.

ANO 5II-5II-1009



SIZE

A3

SCALE

5:1

SHEET

I/I

REV.

C