

4

3

2

1

1.0 MATERIAL & FINISH:

- 1.1 BODY: STAINLESS STEEL, PASSIVATED
 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 1.3 SOLDER FERRULE: BRASS, GOLD PLATED
 1.4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
 1.5 INSULATOR: PEI

2.0 ELECTRICAL DATA:

- 2.1 IMPEDANCE: 50 Ω
 2.2 FREQUENCY RANGE: DC~18GHZ
 2.3 VSWR: 1.25 MAX.



3.0 ENVIRONMENTAL DATA:

- 3.1 TEMPERATURE RANGE: -55°C~+125°C
 3.2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
 3.3 1999/45/EC(REACH): COMPLIANT

4.0 MECHANICAL DATA:

- 4.1 MECHANICAL DURABILITY: 500 CYCLES MIN.
 4.2 CENTER CONTACT: CAPTIVATED
 4.3 OUTER CONTACT: SOLDERED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
D	SW 10.00 [.394 AF.] REMOVED AND SW 9.00 [.354 AF.] ADDED	01/28/15	J. QU
E	CHANGED DRAWINGS	10/14/19	J. QU

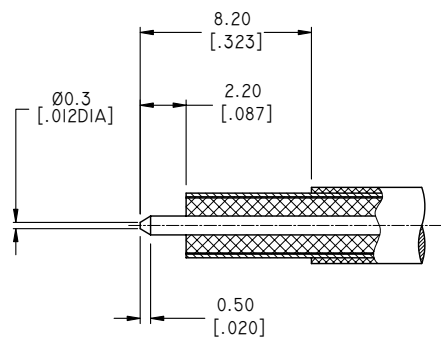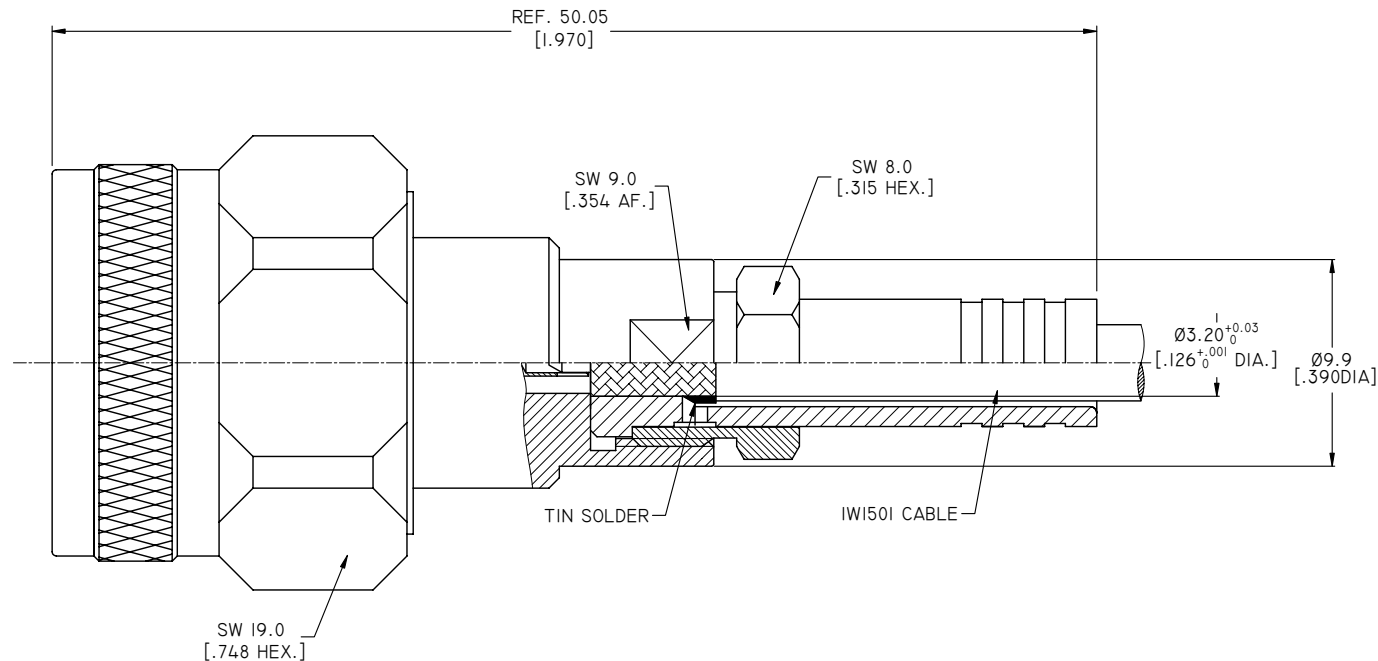


CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	10/14/19
CHECKED	X. B. YANG	DATE	10/14/19
APPROVED	J. QU	DATE	10/14/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
 N STRAIGHT MALE SOLDER FOR IW1501 CABLE CAPTIVATED CONTACT

VIEW



PART NO.

ANO 5111-2153

SIZE
A3SCALE
5:1SHEET
1/1REV.
E

4

3

2

1