


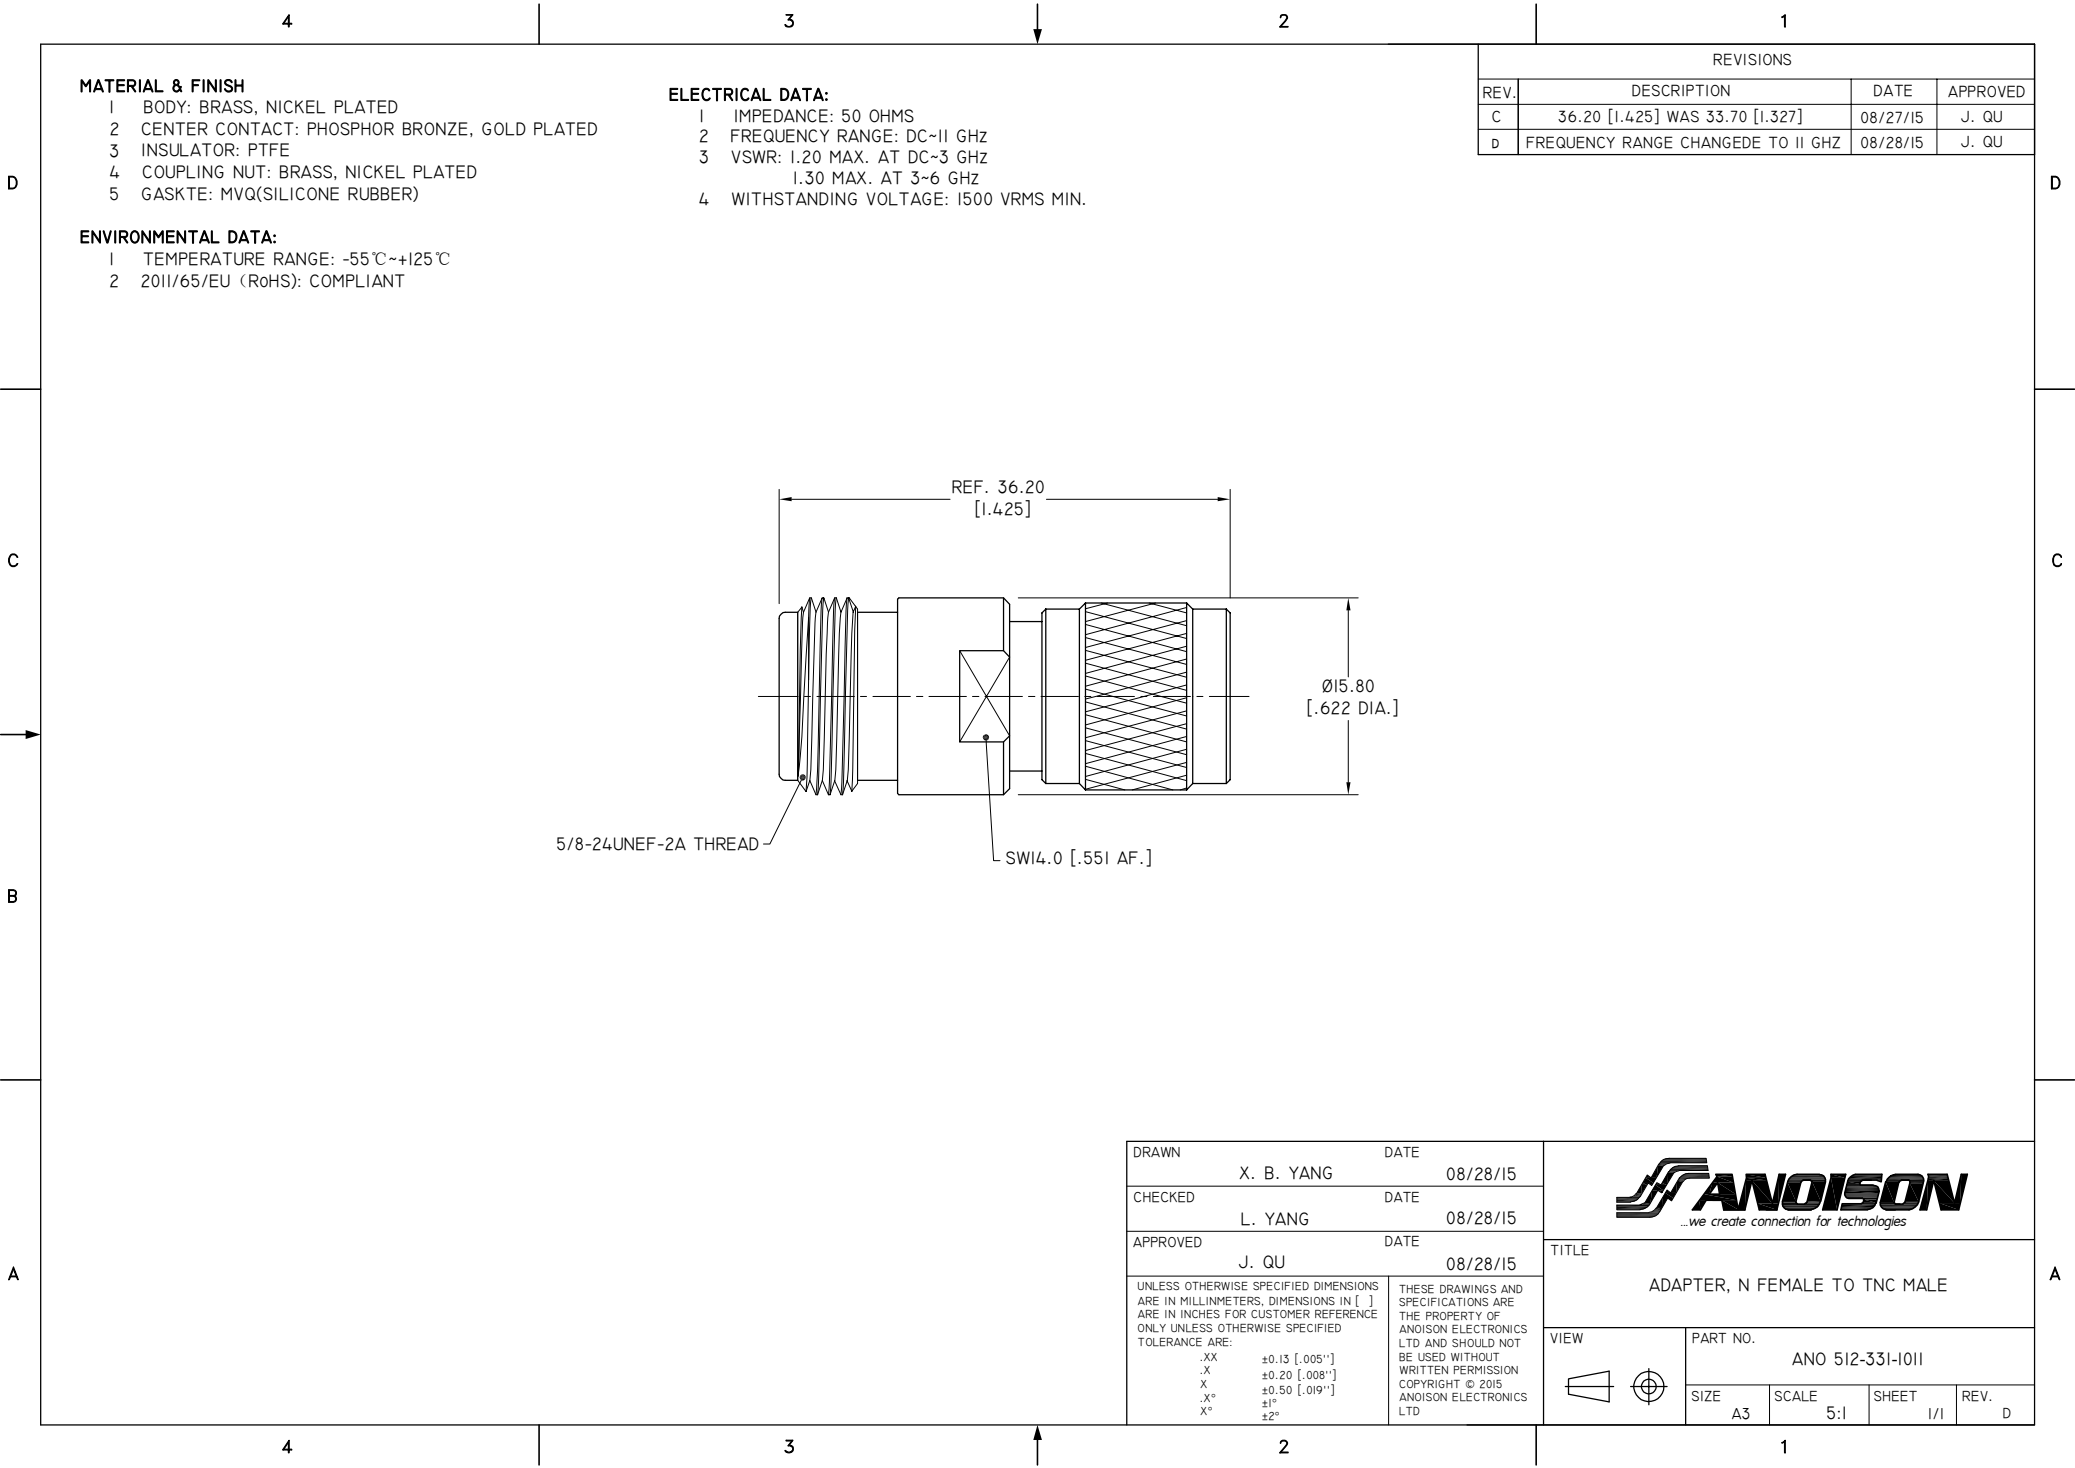

MATERIAL & FINISH

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 GASKTE: MVQ(SILICONE RUBBER)


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~11 GHZ
- 3 VSWR: 1.20 MAX. AT DC~3 GHZ
1.30 MAX. AT 3~6 GHZ
- 4 WITHSTANDING VOLTAGE: 1500 VRMS MIN.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	36.20 [1.425] WAS 33.70 [1.327]	08/27/15	J. QU
D	FREQUENCY RANGE CHANGED TO 11 GHZ	08/28/15	J. QU

DRAWN	X. B. YANG	DATE	08/28/15	 ...we create connection for technologies			
CHECKED	L. YANG	DATE	08/28/15				
APPROVED	J. QU	DATE	08/28/15				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				TITILE			
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°				ADAPTER, N FEMALE TO TNC MALE			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD				VIEW	PART NO.	SIZE	SCALE
					ANO 512-331-1011	A3	5:1
						SHEET	REV.
						1/1	D