

4

3

2

1

## MATERIAL &amp; FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
- 3 COUPLING NUT: BRASS, ALBALOY PLATED
- 4 INSULATOR: PTFE
- 5 GASKET: SILICONE RUBBER

## ELECTRICAL DATA:



- 1 IMPEDANCE: 50  $\Omega$
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: 1.15 MAX. AT DC~3 GHz  
1.20 MAX. AT 3~6 GHz
- 4 PIM3:  $\leq$ 155 DBC(2X43 DBM) AT 0.4~3 GHz

## ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

## REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/09/17	J. QU
B	31.50 [1.240] WAS 31.00 [1.220]	07/03/17	J. QU
C	1. FREQUENCY RANGE CHANGED TO DC~6 GHz 2. VSWR: 1.20 MAX. AT 3~6 GHz ADDED 3. 2015/863/(RoHS): COMPLIANT ADDED 4. 1999/45/EC(REACH): COMPLIANT ADDED	03/14/19	J. QU

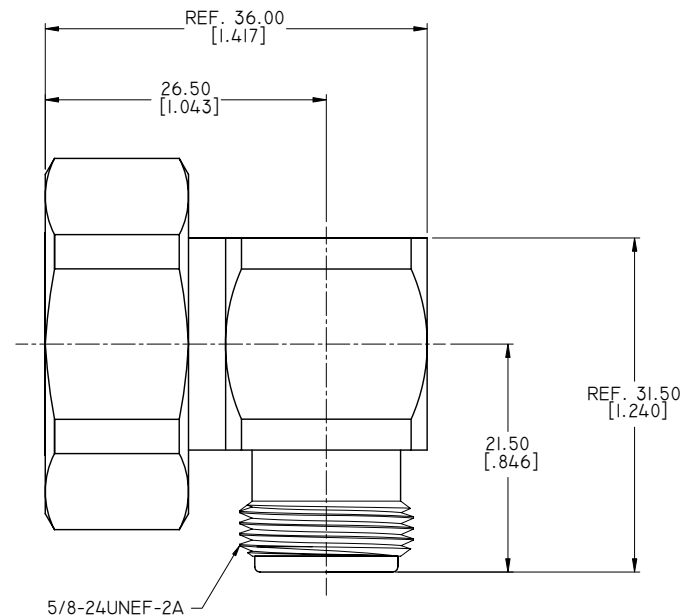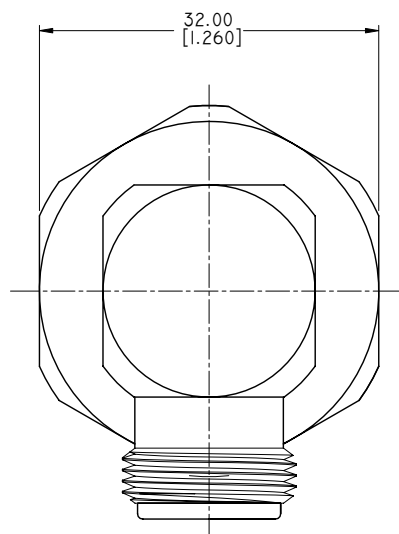

DRAWN	X. B. YANG	DATE	03/14/19
CHECKED	W. YANG	DATE	03/14/19
APPROVED	J. QU	DATE	03/14/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
.X°	±1°		
X°	±2°		



TITLE  
ADAPTER, RIGHT ANGLE 7/16 MALE TO N FEMALE

VIEW



PART NO.

ANO 561-512-2401

SIZE

A3

SCALE

2:1

SHEET

1/1

REV.

C