

MATERIAL & FINISH

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKTE: MVQ(SILICONE RUBBER)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.10 MAX. AT DC~3 GHZ
1.20 MAX. AT 3~6 GHZ
- 4 WITHSTANDING VOLTAGE: 4000 VRMS MIN.
5. INTERMODULATION(3R*; ORDER): < -155 DBC(2X43 DBM) AT 0.4~3 GHZ

MECHANICAL DATA:

- 1 NET WEIGHT: 122.8 G

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/18/19	J. QU
B	FREQUENCY RANGE CHANGED TO DC~6 GHZ	08/15/22	J. QU

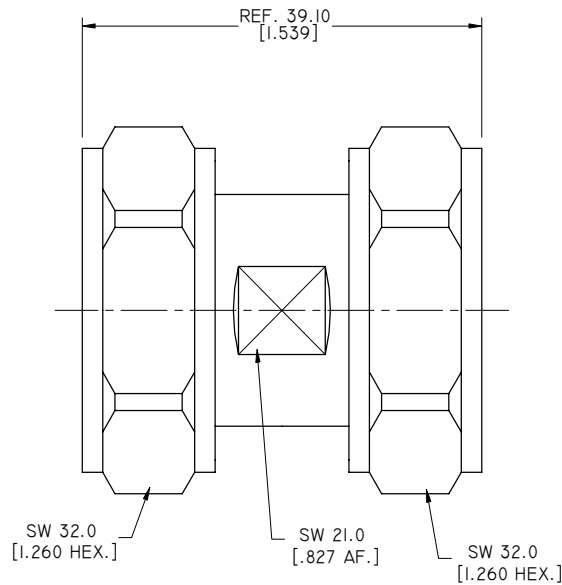

DRAWN	X. Y	DATE	08/15/22
CHECKED	W. Y	DATE	08/15/22
APPROVED	J. Q	DATE	08/15/22
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 202 ANOISON ELECTRONICS LTD	
.XXX .XX .X .X° X°		±0.15 [.006"] ±0.25 [.01"] ±0.50 [.019"] ±1° ±2°	
VIEW		PART NO.	
		ANO 561-561-1231	
SIZE	A3	SCALE	2:1
SHEET	1/1	REV.	B



TITLE
ADAPTER, 7/16 MALE TO 7/16 MALE