

MATERIAL & FINISH

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKTE: MVQ(SILICONE RUBBER)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~3 GHZ
- 3 VSWR: 1.10 MAX.
- 4 WITHSTANDING VOLTAGE: 4000 VRMS MIN.
- 5. INTERMODULATION(3R*; ORDER): < -155 DBC(2X43 DBM) AT 0.4~3 GHZ

MECHANICAL DATA:

- 1 NET WEIGHT: 89.4 G

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/12/12	J. QU
B	FREQUENCY RANGE CHANGED TO DC~3 GHZ	08/15/22	J. QU

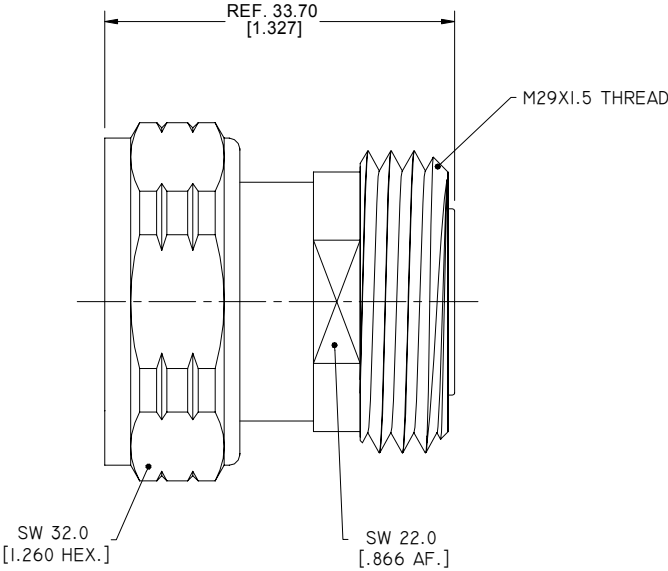

DRAWN	X. Y	DATE	08/15/22				
CHECKED	L. Y	DATE	08/15/22				
APPROVED	J. Q	DATE	08/15/22				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2022 ANOISON ELECTRONICS LTD			
				TITLE			
				ADAPTER, 7/16 MALE TO 7/16 FEMALE			
				VIEW			
				PART NO.			
				ANO 561-562-1233			
				SIZE			
				A3			
				SCALE			
				2:1			
				SHEET			
				1/1			
				REV.			
				B			