

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~300MHz

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 I907/2006/EC(REACH) AND I999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/25/10	J. QU
B	DRAWING FORMAT CHANGED	09/03/19	J. QU

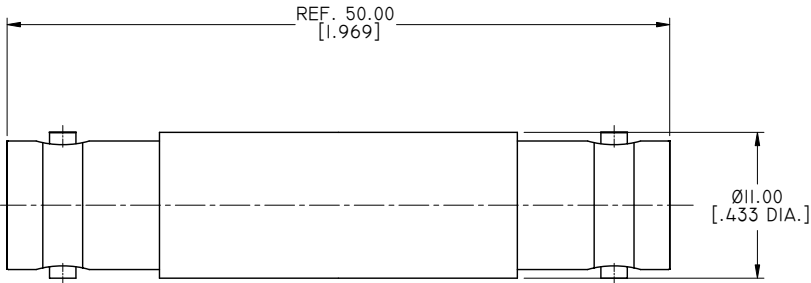

DRAWN		DATE		 ...we create connection for technologies			
X. B. YANG		09/03/19					
CHECKED		DATE					
W. YANG		09/03/19		TITLE ADAPTER, SHV FEMALE TO SHV FEMALE			
APPROVED		DATE					
J. QU		09/03/19		VIEW 			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD					
.XX	±0.13 [.005"]	PART NO.		ANO 572-572-1084			
.X	±0.20 [.008"]	SIZE		A3	SCALE	SHEET	REV.
X	±0.50 [.019"]				2.5:1	1/1	B
X°	±1°						
.X°	±2°						