

MATERIAL & FINISH:

1. BODY: BRASS, ALBALOY PLATED
2. CENTER CONTACT: BRASS, SILVER PLATED
3. INSULATOR: PTFE
4. UNLOCK SLEEVE: BRASS, NICKEL PLATED
5. RESISTOR: ALUMINIUM OXIDE


ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -25 °C ~ +85 °C
2. 2011/65/EU (RoHS): COMPLIANT
3. NET WEIGHT: 7.51G

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~6GHZ
3. VSWR: 1.15 MAX. AT DC ~ 3GHZ
1.20 MAX. 3 DC ~ 6GHZ
4. AVERAGE POWER: 0.5 WATT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	TECHNICAL DATA CHANGED	01/12/13	J. QU
C	FREQUENCY RANGE CHANGED	01/14/13	J. QU

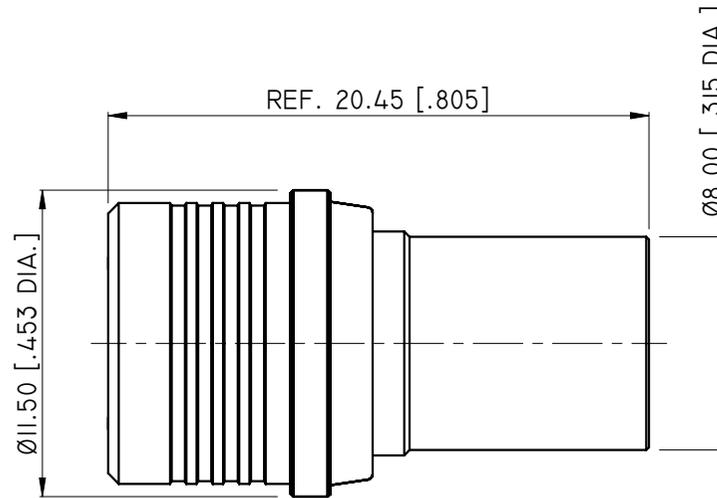

DRAWN	X. B. YANG	DATE	01/14/13				
CHECKED	L. YANG	DATE	01/14/13				
APPROVED	J. QU	DATE	01/14/13				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2013 ANOISON ELECTRONICS LTD		TITLE COAXIAL TERMINATION QMA MALE, 0.5 WATTS, DC~6GHZ			
.XX	±0.13 [.005"]			VIEW		PART NO. ANO 726-106	
.X	±0.20 [.008"]			SIZE	SCALE	SHEET	REV.
X	±0.50 [.019"]			A3	5:1	1/1	C
.X°	±1°						
X°	±2°						