

4 3 2 1

MATERIAL & FINISH:

- 1. BODY: STAINLESS STEEL, GOLD PLATED
- 2. CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATED
- 3. INSULATOR: PTFE



ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -55°C~+125°C
- 2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~65GHZ

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/02/21 | J. QU |
| | | | |

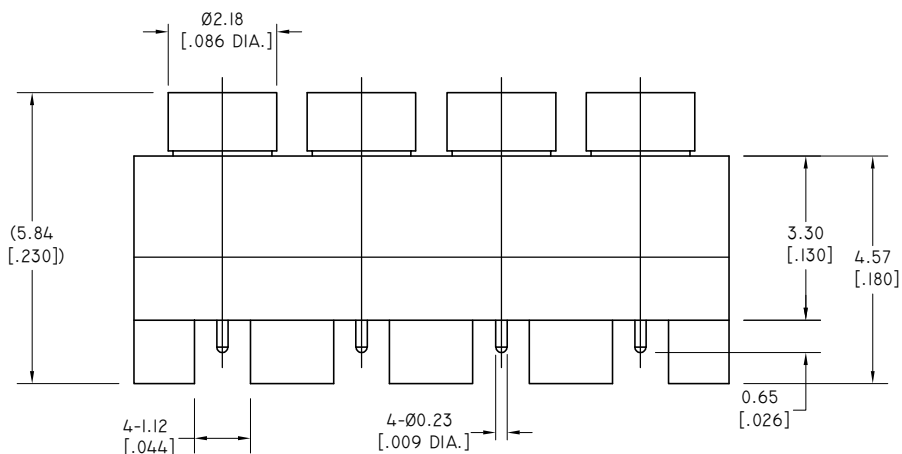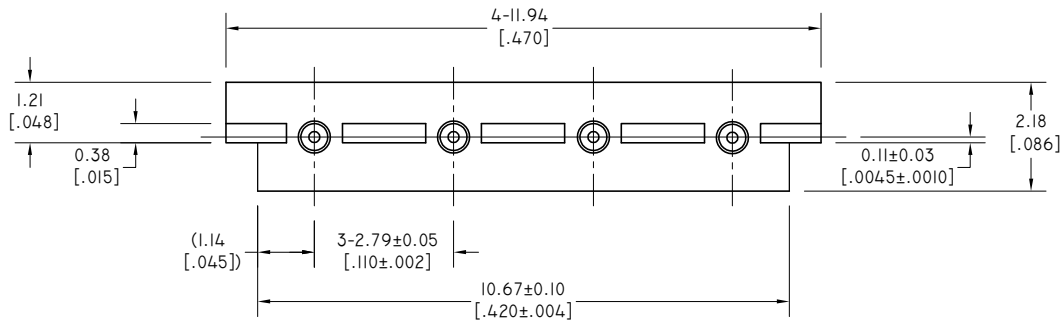

| PART NO. | INTERFACE |
|-----------------|-------------|
| ANO 7811-5002-1 | FULL DETENT |
| ANO 7811-5002-2 | SMOOTH BORE |

| | | | |
|---|---------------|--|----------|
| DRAWN | W. YANG | DATE | 11/02/21 |
| CHECKED | L. YANG | DATE | 11/02/21 |
| APPROVED | J. QU | DATE | 11/02/21 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| X° | ±1° | | |
| X* | ±2° | | |



TITLE
SMPS STRAIGHT MALE 4-PORT EDGE LAUNCH

| | | | | | |
|------|----|----------|---------------|-------|-----|
| VIEW | | PART NO. | ANO 7811-5002 | | |
| SIZE | A3 | SCALE | 10:1 | SHEET | 1/1 |
| REV. | A | | | | |

4 3 2 1