

MATERIAL & FINISH:

- 1 BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~67 GHz
- 3 VSWR: 1.25 MAX. AT DC~26.5 GHz
1.40 MAX. AT 26.5~40 GHz
1.60 MAX. AT 40~67 GHz

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+165°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/28/19	J. Q
B	FREQUENCY CHANGED	04/22/24	J. Q

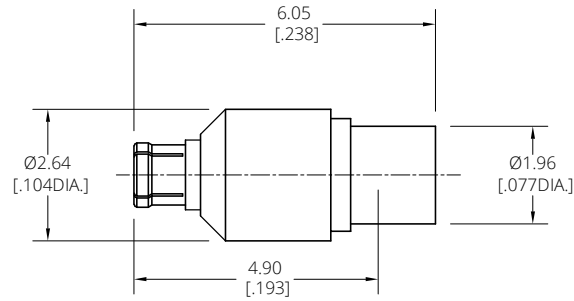

CABLE STRIPPING DIMENSIONS

DRAWN	W. Y	DATE	04/22/24				
CHECKED	X. Y	DATE	04/22/24				
APPROVED	J. Q	DATE	04/22/24				
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>				<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD</small>			
<small>XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°</small>				TITLE SMPS STRAIGHT FEMALE SOLDER FOR .047 CABLE			
VIEW		PART NO.		SHEET		REV.	
		ANO 7812-2001		1/1		B	
SIZE A3		SCALE 10:1		SHEET 1/1		REV. B	