

4

3

2

1

MATERIAL & FINISH:

- 1. BODY: BRASS, GOLD PLATED
- 2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3. OUTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 4. SPRING LATCH: BRASS, GOLD PLATED
- 5. NUT: BRASS, GOLD PLATED
- 6. INSULATOR: PTFE



ENVIRONMENTAL DATA:

- 1. TEMPERATURE RANGE: -40°C~+85°C
- 2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1. IMPEDANCE: 50 Ω
- 2. FREQUENCY RANGE: DC~12.4GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/12/14	J. QU
B	DRAWING FORMAT CHANGED	08/09/17	J. QU

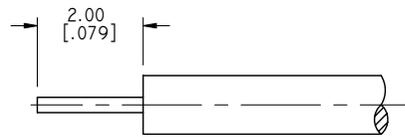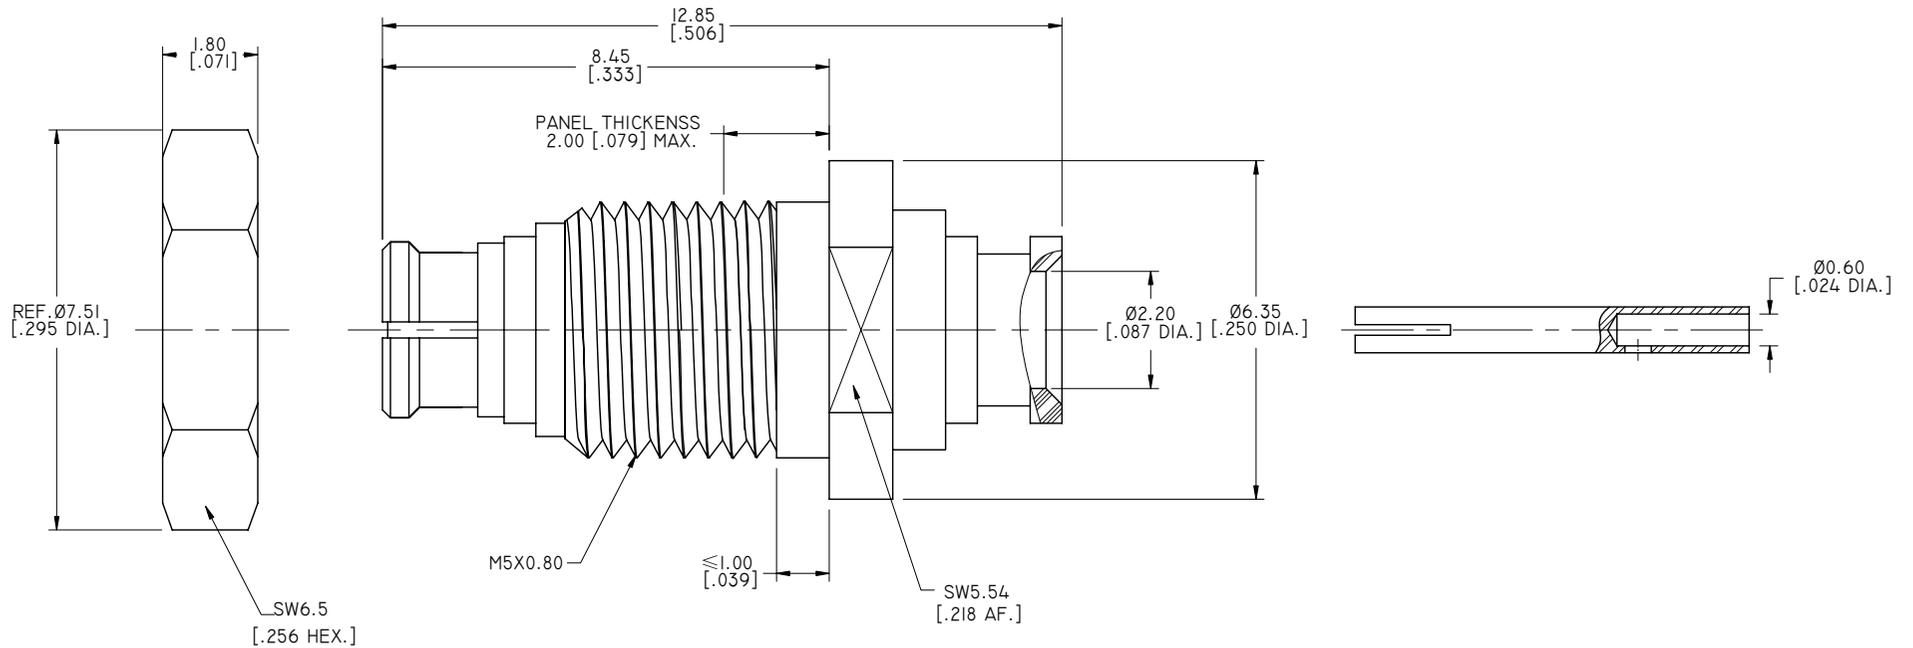

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	08/09/17
CHECKED	X. B. YANG	DATE	08/09/17
APPROVED	J. QU	DATE	08/09/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
SMP STRAIGHT FEMALE BULKHEAD SOLDER FOR .086 CABLE			
VIEW		PART NO.	
		ANO 9312-5038	
SIZE	SCALE	SHEET	REV.
A3	10:1	I/1	B

4

3

2

1