

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/08/20	J. QU

MATERIAL & FINISH:


1. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
2. BODY: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PTFE

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -65°C~+165°C
2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~65GHZ

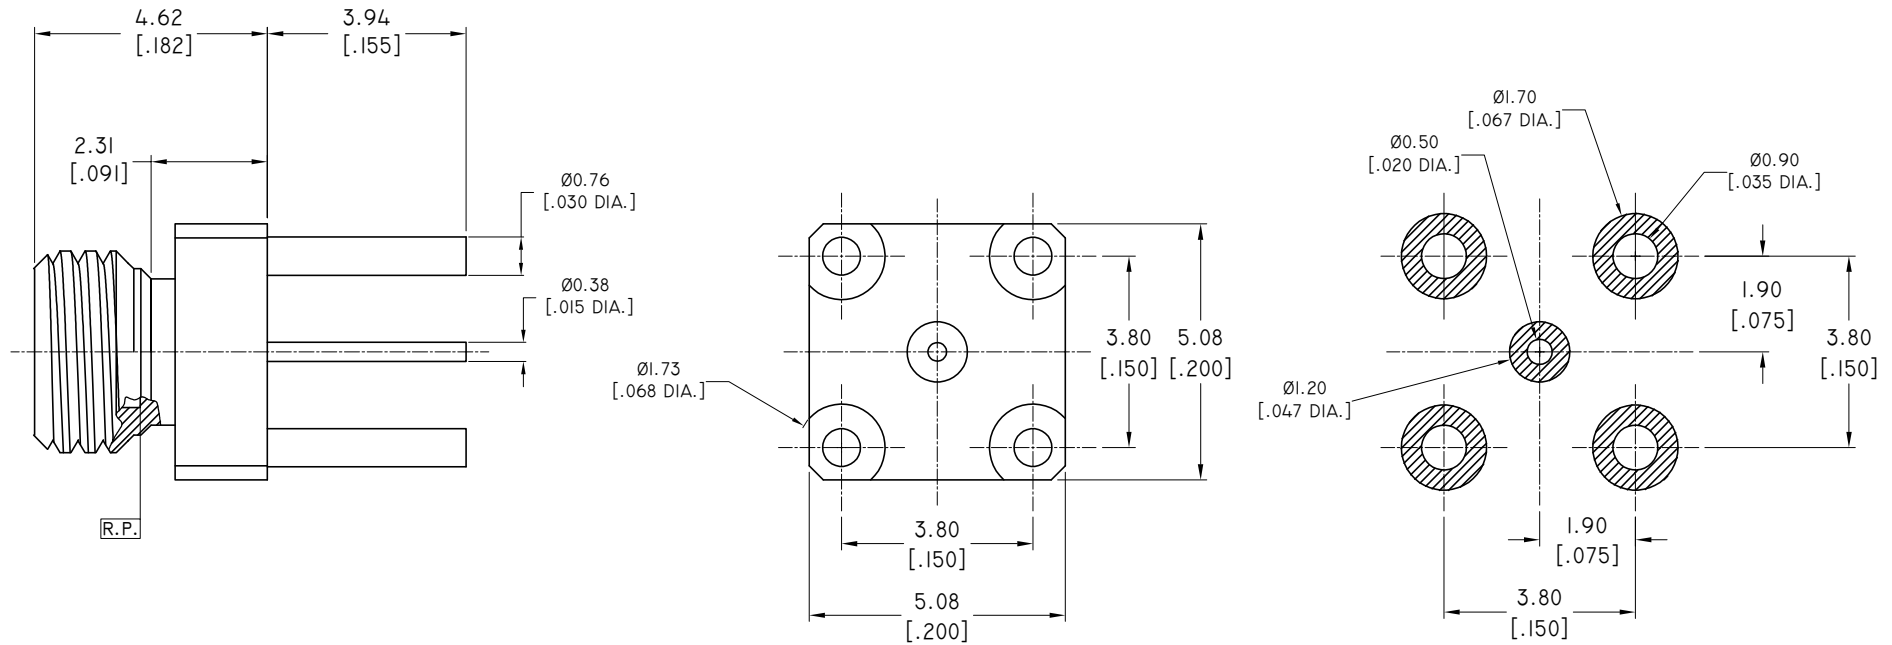

RECOMMENDED MOUNTING HOLE

PART NO.	"A" INTERFACE
ANO 9411-5041-1	FULL DETENT
ANO 9411-5041-2	SMOOTH BORE

DRAWN	W. YANG	DATE	01/08/20		
CHECKED	L. YANG	DATE	01/08/20		
APPROVED	J. QU	DATE	01/08/20		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD		TITLE	SMPM-T STRAIGHT MALE FOR PCB MOUNT
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				VIEW	
				PART NO.	ANO 9411-5041
				SIZE	A3
				SCALE	10:1
				SHEET	1/1
				REV.	A

4

3

2

1