

4

3

2

1

MATERIAL & FINISH:

- 1 SQUARE SHELL: BRASS, SILVER PLATED
- 2 FRONT SHELL: BRASS, NICKEL PLATED
- 3 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 4 NUT: BRASS, NICKEL PLATED
- 5 WASHER: BRASS, NICKEL PLATED
- 6 INSULATOR: PTFE



ELECTRICAL DATA:

- 1 IMPEDANCE: 75 Ω
- 2 FREQUENCY RANGE: DC~3 GHz
- 3 VSWR: 1.40 MAX. AT DC~1 GHz


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS)AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/02/16	J. QU
B	VSWR ADDED	11/04/16	J. QU
C	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	10/08/18	J. QU

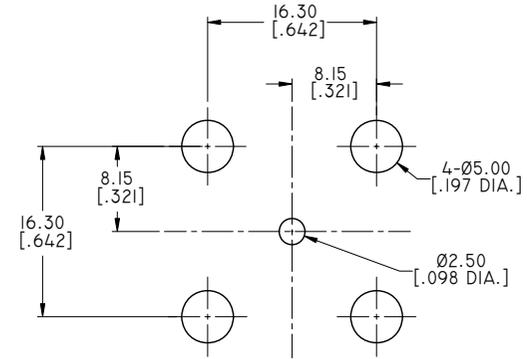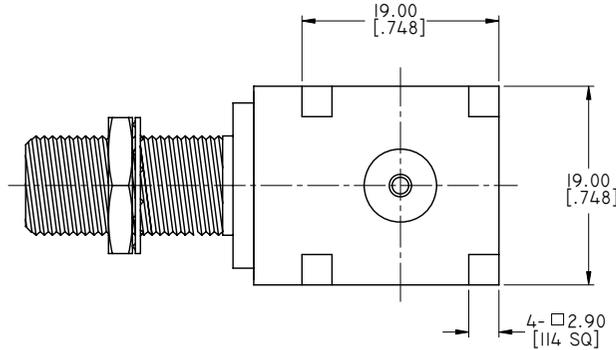

RECOMMENDED MOUNTING HOLE

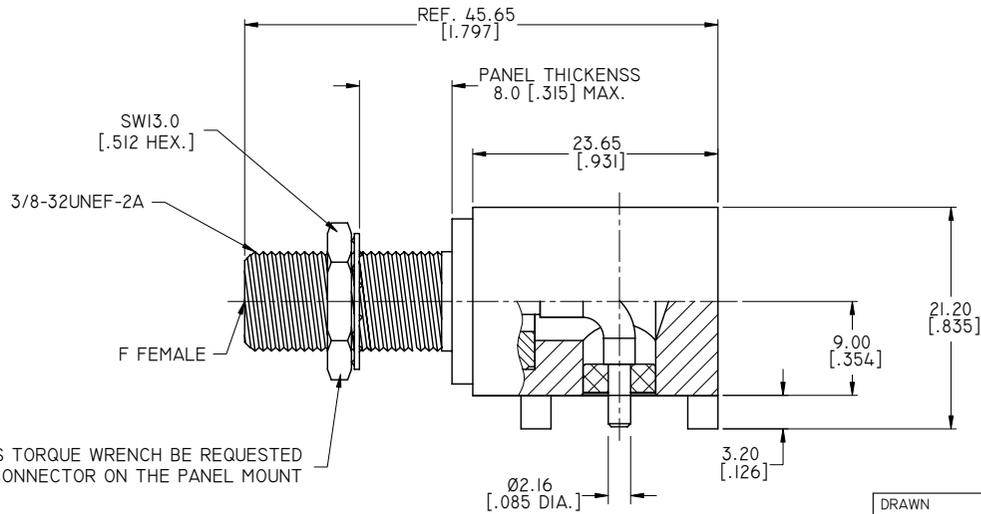

A 20 IN.LBS TORQUE WRENCH BE REQUESTED WHEN FIX THE CONNECTOR ON THE PANEL MOUNT

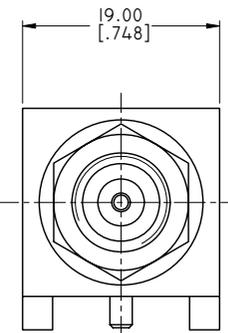

DRAWN	P. CHEN	DATE	10/08/18
CHECKED	X. B. YANG	DATE	10/08/18
APPROVED	J. QU	DATE	10/08/18



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.xx	±0.13 [.005"]
.x	±0.20 [.008"]
x	±0.50 [.019"]
x°	±1°
x°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD

TITLE  
75 OHM F FEMALE R/A BULKHEAD CONNECTOR SOLDER ATTACHMENT THRU HOLE PCB .380 INCH HOLE

VIEW	PART NO. ANO 9722-4018			
	SIZE A3	SCALE 2:1	SHEET 1/1	REV. C

4

3

2

1