


ELECTRICAL DATA:


- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~2.4 GHZ
- 3 VSWR: 1.40 MAX.
- 4 INSERTION LOSS: 2.8 DB MAX.

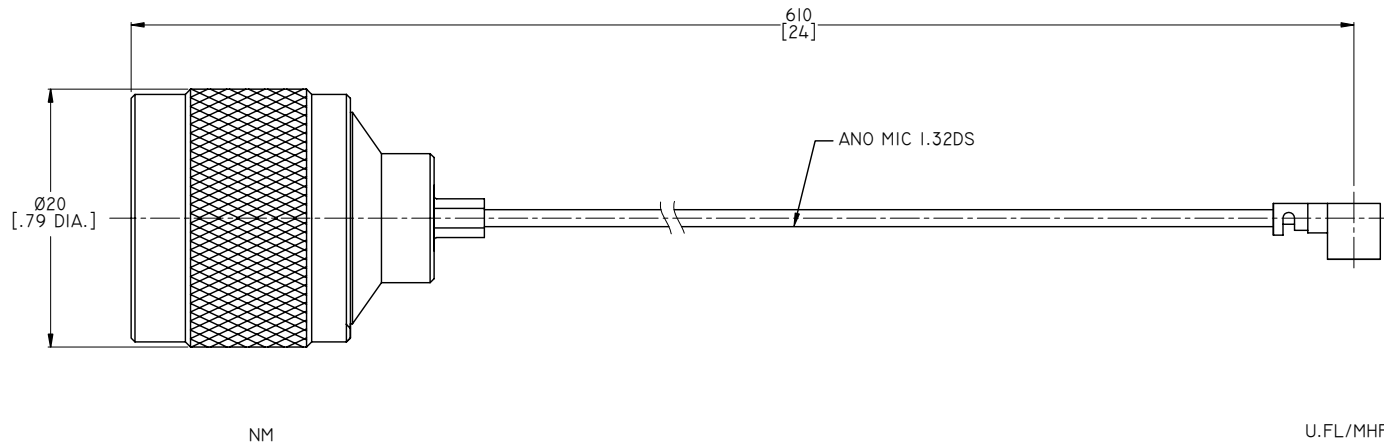

TITLE
 CABLE ASSEMBLY, N STRIGHT MALE TO U.FL/MHF
 R/A PLUG, ANO MIC 1.32DS (DOUBLE SHIELDED)
 CABLE, 24 INCHS

- NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGED WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES
 4. LENGTH TOLERANCE IS ±1.5%.

VIEW



PART NO.

MIC132DS-NM-MHF-24

SIZE
A3

SCALE
2.5:1

SHEET
1/1

REV.
A