

MATERIAL & FINISH:

- 1 BODY & SLEEVE: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-40 GHz
- 3 VSWR: 1.50 MAX.


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/15/24	J. Q

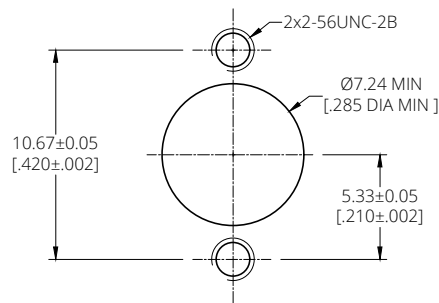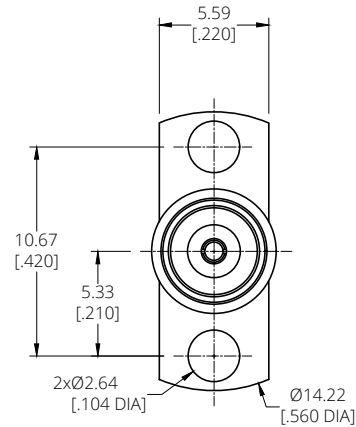

RECOMMENDED MOUNTING HOLE

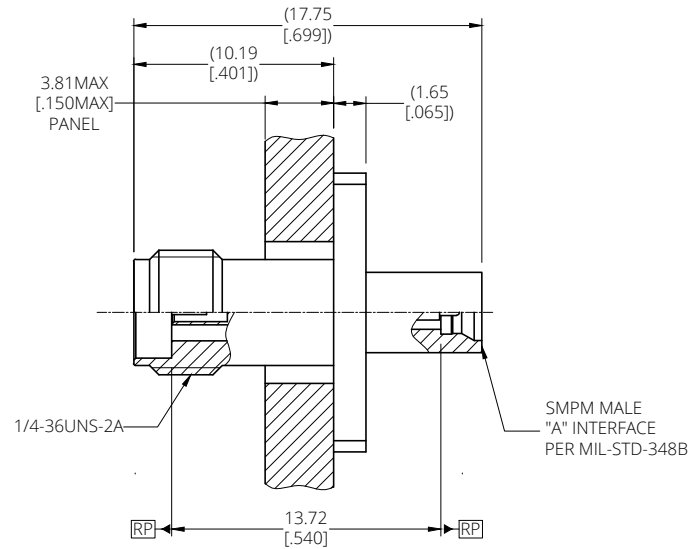

ANO P/N	"A"INTERFACE
PA2994U-1	FULL DETENT
PA2994U-2	SMOOTH BORE

DRAWN	Y. H	DATE	04/15/24
CHECKED	W. Y	DATE	04/15/24
APPROVED	J. Q	DATE	04/15/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD	
XX		±0.13 [0.005"]	
X		±0.20 [0.008"]	
X°		±0.50 [0.019"]	
X"		±1°	
X"		±2°	

TITLE PRECISION ADAPTER, 2.92MM FEMALE TO SMPM MALE 2 HOLE FLANGE			
VIEW 		PART NO. PA2994U	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A