

1.0 MATERIAL & FINISH:

- 1.1 BODY: STAINLESS STEEL, PASSIVATED
1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
1.3 INSULATOR: PEI
1.4 O-RING: SILICONNE RUBBER

2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55℃~+125℃
2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:


- 3.1 IMPEDANCE: 50 Ω
3.2 FREQUENCY RANGE: DC~18GHz
3.3 VSWR: 1.15 MAX.
3.4 INSERTION LOSS: 0.1X √F (GHz) DB


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/26/21	J. QU

Ø16.00
[Ø.630 DIA.]

14.80
[.583]

RECOMMENDED MOUNTING HOLE

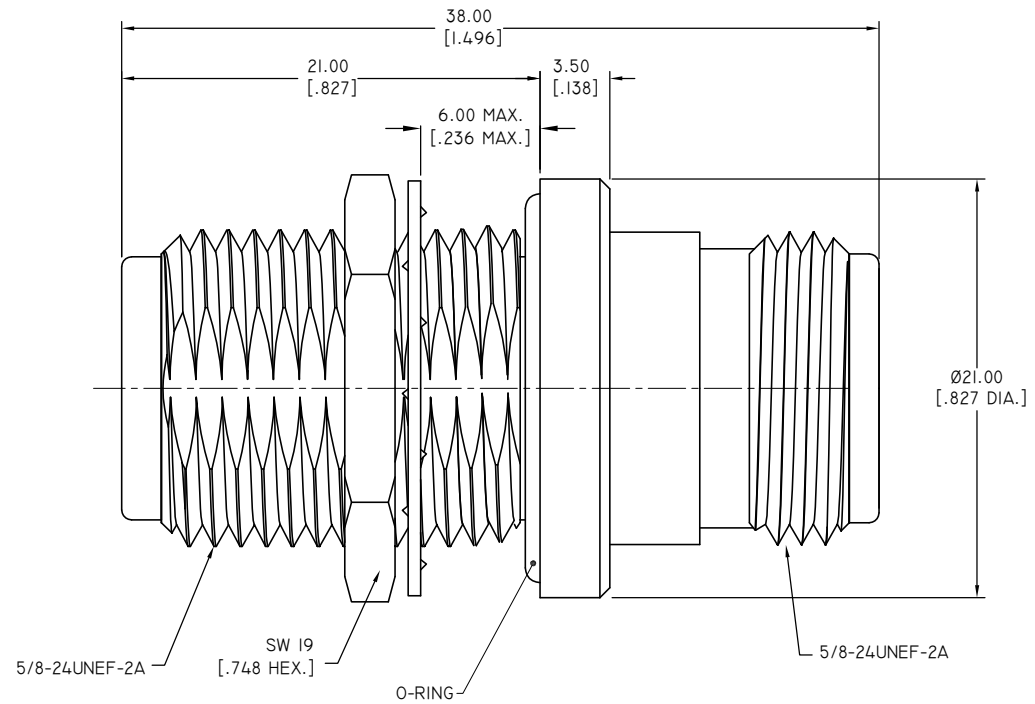

DRAWN		W. YANG		DATE		11/26/21			
CHECKED		X. B. YANG		DATE		11/26/21			
APPROVED		J. QU		DATE		11/26/21			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD					
.XX ±0.13 [.005"]				 TITLE PRECISION ADAPTER N FEMALE BULKHEAD TO N FEMALE					
.X ±0.20 [.008"]									
X° ±0.50 [.019"]									
±1°									
±2°									
VIEW		PART NO.		PA5151EA					
		SIZE		SCALE		SHEET		REV.	
		A3		4:1		1/1		A	