

MATERIAL & FINISH:
 1 BODY: STAINLESS STEEL, GOLD PLATED
 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 3 INSULATOR: PEI & PTFE
 4 COUPLING NUT: STAINLESS STEEL, GOLD PLATED

ELECTRICAL DATA:
 1 IMPEDANCE: 50 Ω
 2 FREQUENCY RANGE: DC~50 GHz
 3 VSWR: 1.25 MAX.
 4 INSERTION LOSS: $\leq 0.08^* \sqrt{F} (\text{GHz}) \text{ DB}$

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/18/21	J QU

D

D

C


C

B

B

A

A

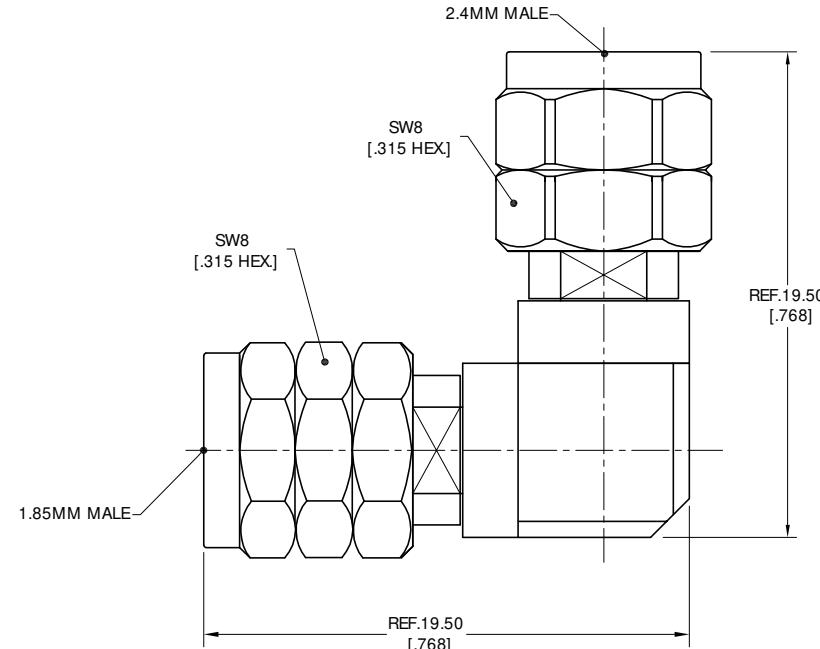

DRAWN P. CHEN	DATE 06/18/21	 ANOISON PRECISION ADAPTER RIGHT ANGLE 1.85MM MALE TO 2.4MM MALE	
CHECKED X. B. YANG	DATE 06/18/21		
APPROVED J QU	DATE 06/18/21		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:			
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] X° ±1° X° ±2°			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	VIEW  PART NO. PA6222J		
	SIZE A3	SCALE 5:1	
	SHEET 1/1	REV. A	