

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI

MECHANICAL DATA:

- 1 MECHANICAL DURABILITY: 1000 CYCLES
- 2 RECOMMENDED TORQUE: 0.8~1.1 NM


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~26.5 GHz
- 3 VSWR: 1.15 MAX.

ENVIRONMENTAL DATA:

- 1 STORAGE TEMPERATURE: -55 °C~+125 °C
- 2 OPERATING TEMPERATURE: 0 °C~+85 °C
- 3 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
- 4 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/25/21	J QU

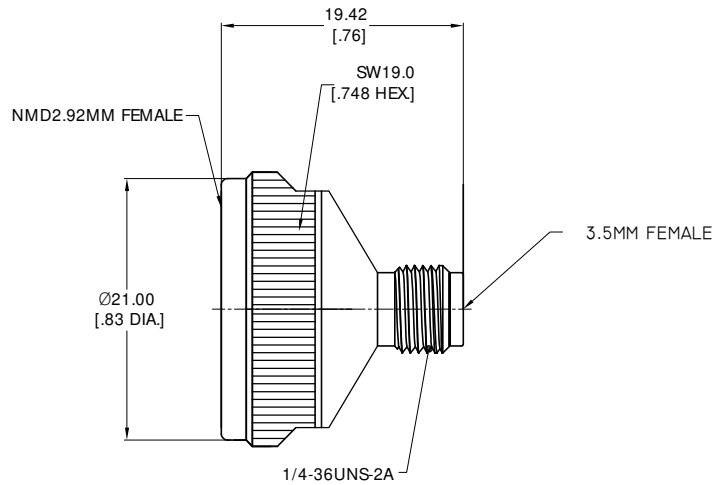

DRAWN	W. YANG	DATE	05/25/21
CHECKED	X. B. YANG	DATE	05/25/21
APPROVED	J QU	DATE	05/25/21
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005]		
.X	±0.20 [.008]		
X	±0.50 [.019]		
.X°	±1°		
X°	±2°		

TITLE PRECISION ADAPTER NMD2.92MM FEMALE TO 3.5MM FEMALE			
VIEW		PART NO. PA6425CA	
		SIZE A3	SCALE 2.5:1
		SHEET 1/1	REV. A