

MATERIAL & FINISH:

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PEI

ENVIRONMENTAL DATA:


1. STORAGE TEMPERATURE: -55°C~+125°C
2. OPERATING TEMPERATURE: 0°C~+85°C
3. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~26.5 GHz
3. VSWR: 1.15 TYP.
4. INSERTION LOSS: 0.23 DB MAX.


MECHANICAL DATA:

1. MECHANICAL DURABILITY: 2000 CYCLES MIN.
2. RECOMMENDED TORQUE:
NMD3.5MM FEMALE: 1.35~2 NM
2.4MM FEMALE: 0.9 NM

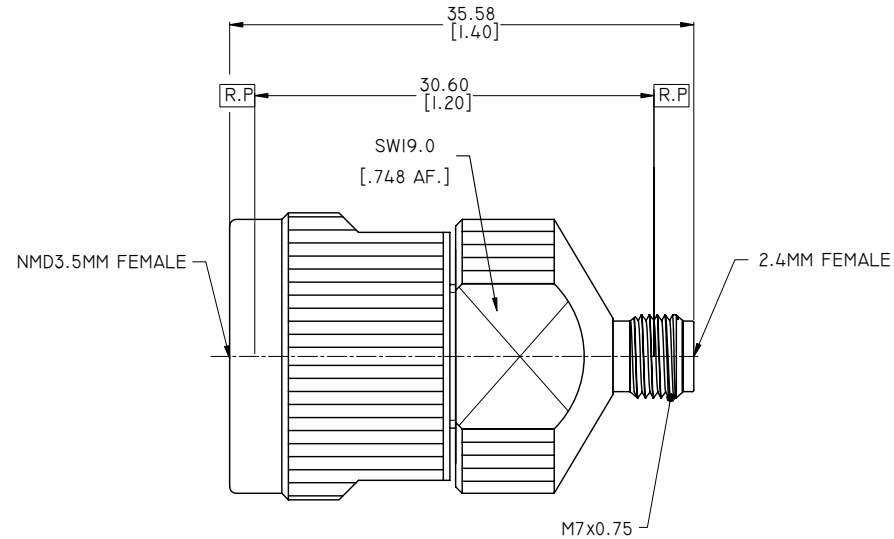

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/29/17	J. QU

DRAWN		P. CHEN		DATE		12/29/17									
CHECKED		X. B. YANG		DATE		12/29/17									
APPROVED		J. QU		DATE		12/29/17									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD				TITLE							
								PRECISION ADAPTER, NMD3.5MM FEMALE TO 2.4MM FEMALE							
VIEW 				PART NO. PA7I22C				SIZE		SCALE		SHEET		REV.	
								A3		2.5:1		1/1		A	