


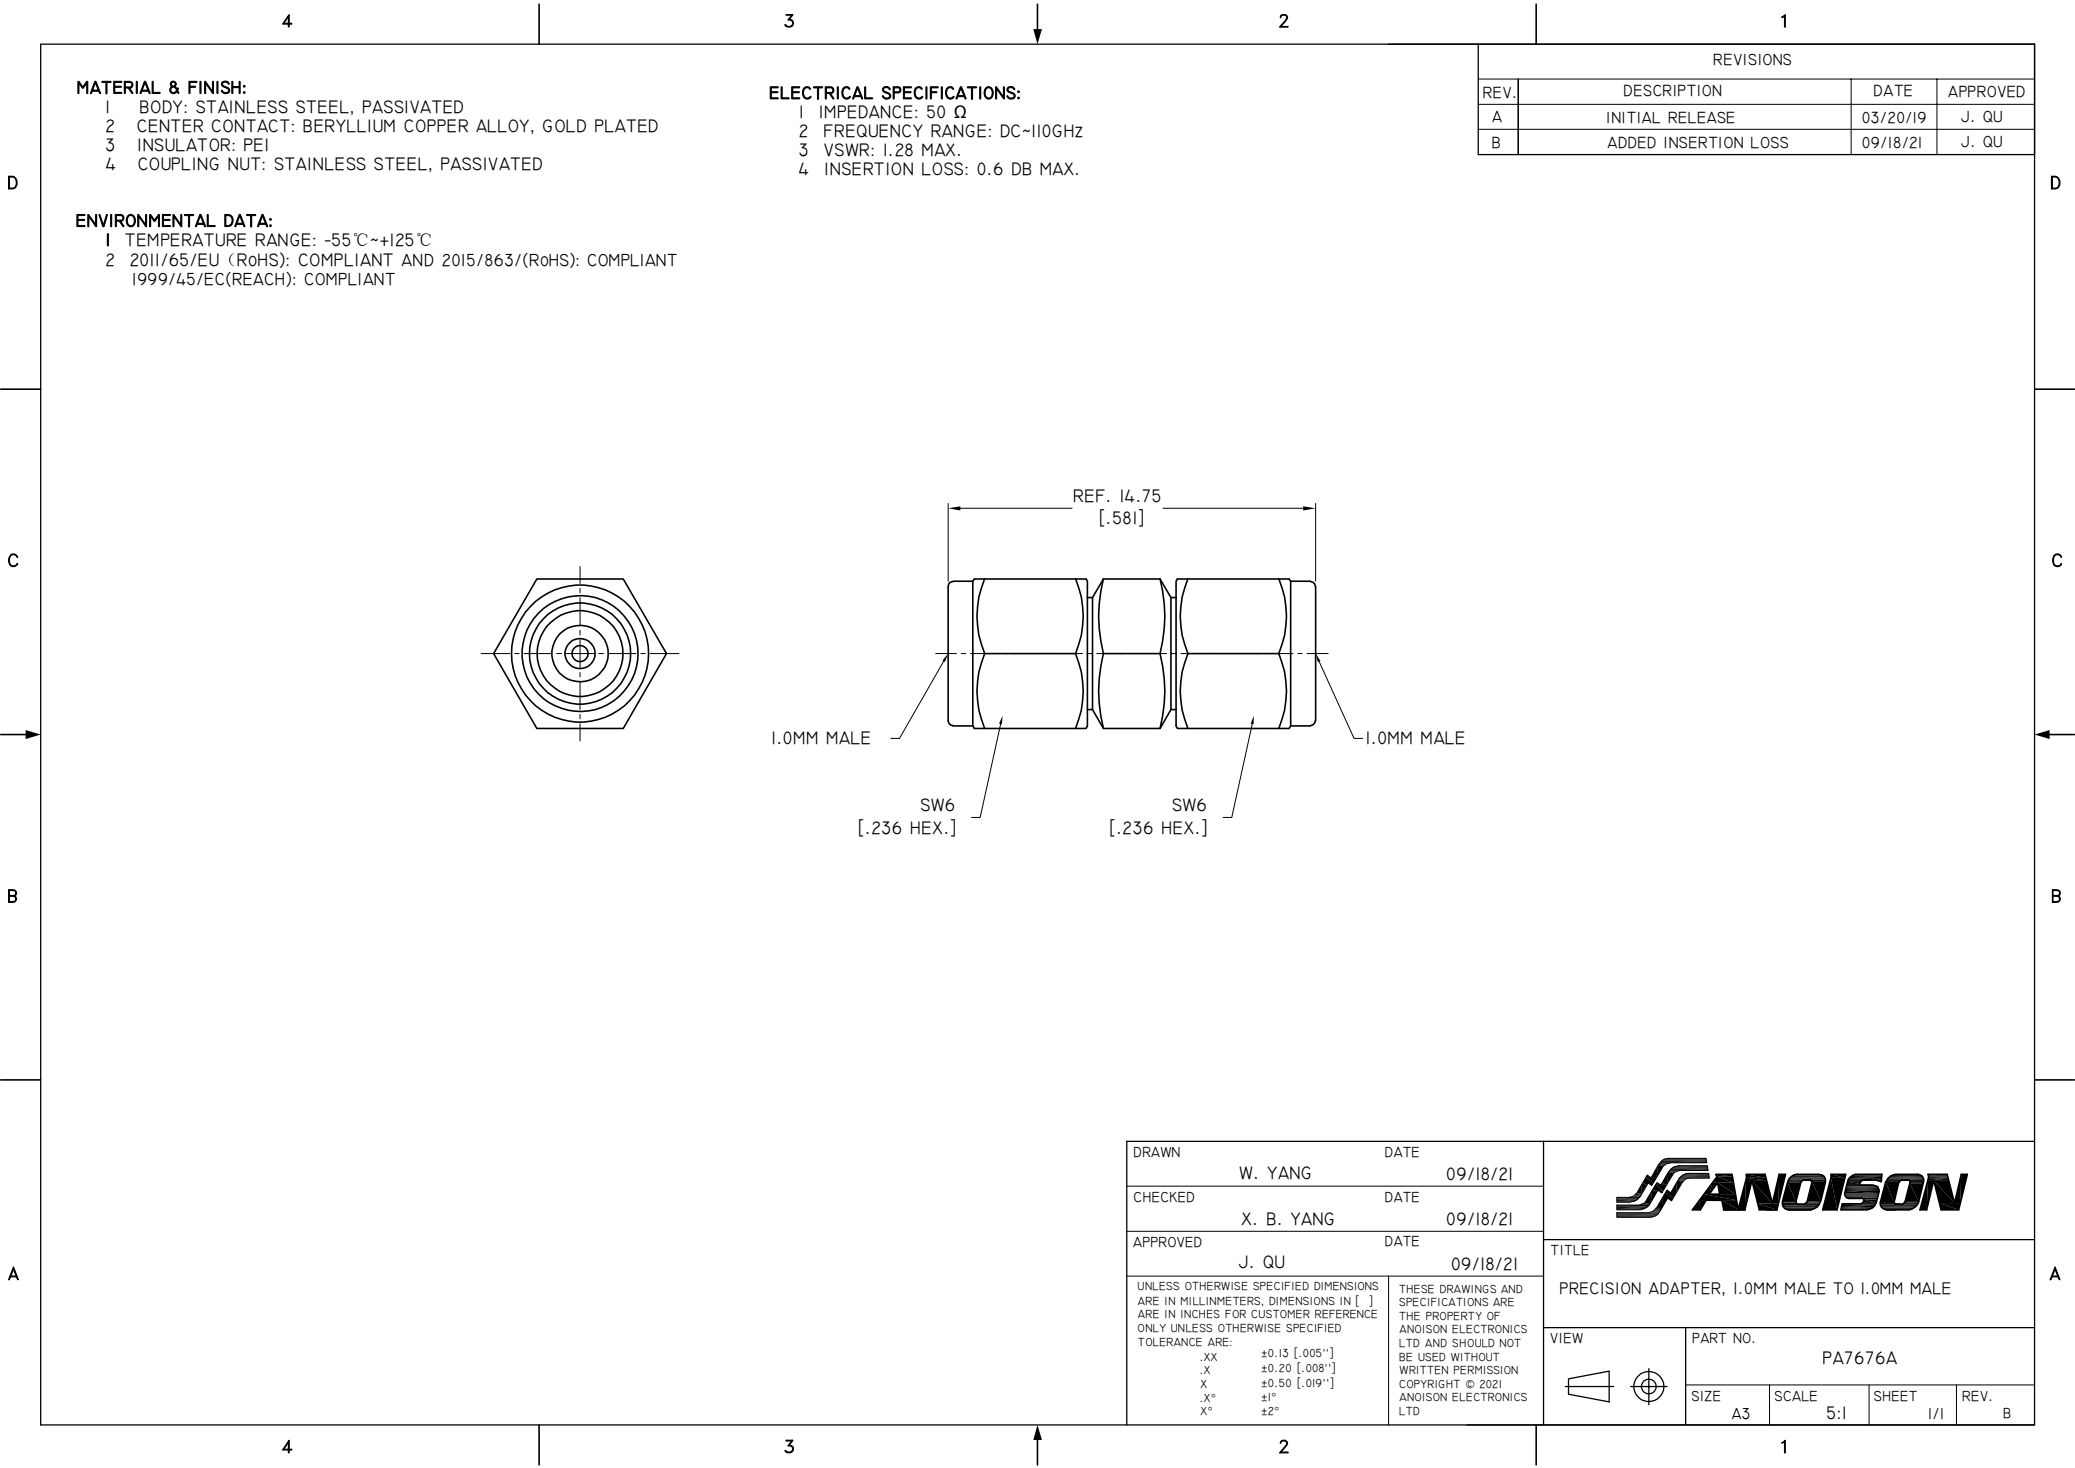

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED


ELECTRICAL SPECIFICATIONS:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~110GHZ
- 3 VSWR: 1.28 MAX.
- 4 INSERTION LOSS: 0.6 DB MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 $^{\circ}$ C~+125 $^{\circ}$ C
- 2 2011/65/EU (RoHS): COMPLIANT AND 2015/863/(RoHS): COMPLIANT
- 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/20/19	J. QU
B	ADDED INSERTION LOSS	09/18/21	J. QU

DRAWN		W. YANG		DATE		09/18/21	
CHECKED		X. B. YANG		DATE		09/18/21	
APPROVED		J. QU		DATE		09/18/21	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD			
.XX ±0.13 [.005"]				VIEW  PART NO. PA7676A SIZE A3 SCALE 5:1 SHEET 1/1 REV. B			
.X ±0.20 [.008"]							
X ±0.50 [.019"]							
X° ±1°							
X° ±2°							
 TITLE PRECISION ADAPTER, 1.0MM MALE TO 1.0MM MALE							