

1.0 MATERIAL & FINISH

1.1 BODY: BRASS, ALBALOY PLATED

1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED

1.3 COUPLING NUT: BRASS, ALBALOY PLATED

1.4 INSULATOR: PTFE

2.0 ENVIRONMENTAL DATA:

2.1 TEMPERATURE RANGE: -55°C~+125°C

2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:

3.1 IMPEDANCE: 50 Ω


3.2 FREQUENCY RANGE: DC~18GHZ

3.3 VSWR: ≤1.15 AT DC~6GHZ

≤1.30 AT 6~18GHZ

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/26/12	J. QU
B	DIMENSION CHANGED	12/19/12	J. QU
C	MODIFY VSWR	02/21/17	J. QU

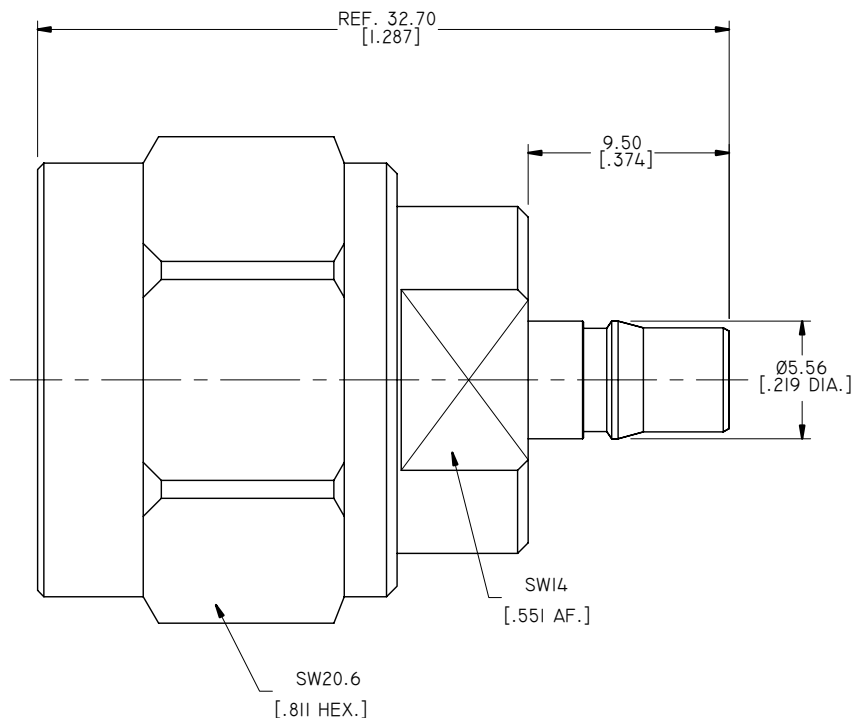

DRAWN	DATE
L. YANG	02/21/17
CHECKED	DATE
X. B. YANG	02/21/17
APPROVED	DATE
J. QU	02/21/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD
.XX ±0.13 [.005"]	
.X ±0.20 [.008"]	
X ±0.50 [.019"]	
X° ±1°	
X° ±2°	



TITLE			
ADAPTER, N MALE TO QMA FEMALE			
VIEW	PART NO.		
 	ANO 262-511-1036		
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	C