

MATERIAL & FINISH

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE


ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55℃~+125℃
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.10 MAX. AT DC~3 GHZ
1.20 MAX. AT 3~6 GHZ
- 4 WITHSTANDING VOLTAGE: 2500 VRMS MIN.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/08/15	J. QU

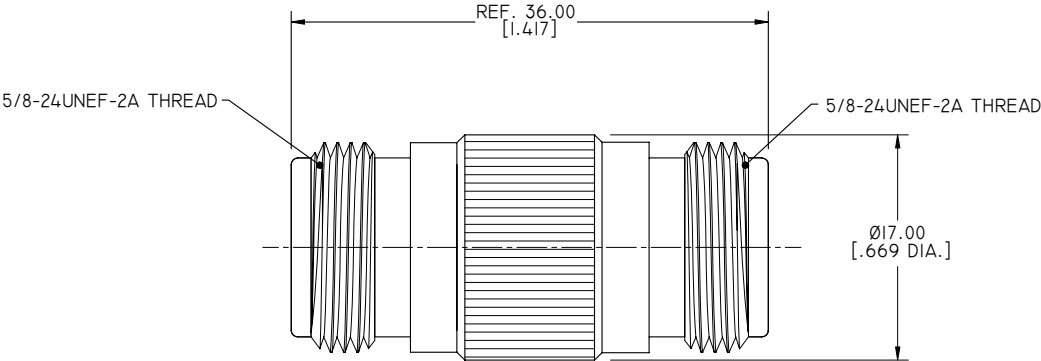

DRAWN	X. B. YANG	DATE	05/08/15	 ...we create connection for technologies			
CHECKED	L. YANG	DATE	05/08/15				
APPROVED	J. QU	DATE	05/08/15				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:				TITLE			
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				ADAPTER, N FEMALE TO N FEMALE			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD				VIEW	PART NO.		
					ANO 512-512-I081		
				SIZE	SCALE	SHEET	REV.
				A3	2.5:1	1/1	A